




30W 0-10V 'Dim to Dark' LED Driver

SOLOdrive

SOLOdrive offers industry-best Natural Dimming to dark - LED dimming made beautiful! With any dimmer, in any application. Symbiosis on SOLOdrive stands for unity, for the SOLOdrive working seamlessly together with LED modules, controls and intelligent luminaire elements.

Product offering

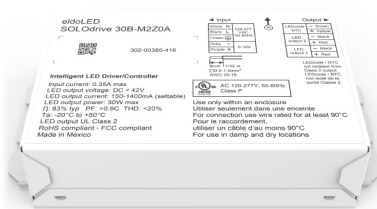

SOLOdrive 30B-M2Z0A

| | |
|---------------------|---|
| Part number (P/N) | SL30B-M2Z0A1 |
| Product description | SOLOdrive AC, 30W, 0-10V, 1 control channel, constant current, 2x 42V output, bottom feed, square metal |

Features & benefits

| | |
|----------------------|---|
| Natural dimming | Dim to dark, smooth brightness changes, excellent flicker performance, adaptable dimming curves, configurable minimum dimming level |
| LightShape | Dim to Warm: decrease colour temperature when dimming |
| Symbiosis | Seamless interoperability with LED modules, controls and in-luminaire intelligent devices |
| LEDcode | Configurable design to work with most constant current LED modules and arrays, while providing a connection point to integrated peripheral controls |
| Programmable | Fine-tune your driver for any application |
| Performance | Universal input voltage range, low inrush current and total harmonic distortion (THD), high power factor and efficiency |
| Camera compatibility | Hybrid HydraDrive technology is proven to work in TV studios and security camera environments |

Programming tools


| | |
|-------------------------------------|---|
| Programming interface | TOOLbox pro (TLU20504) |
| Programming cable set | TOOLbox pro to LED driver, programming cable, 5pcs (TLC03051) |
| Programming Hand-held, Touch-and-Go | PJ0050HL1 |
| Programming jig | PJ0300BL1 |
| Programming software | FluxTool |

Warranty



| | |
|-----------------|--|
| Warranty period | General Terms and Conditions |
|-----------------|--|

Order number configurator

Standard

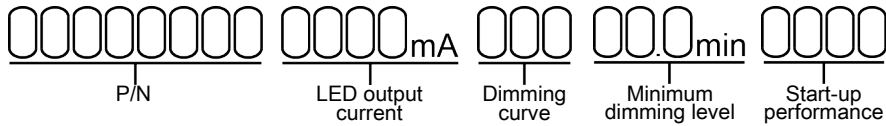

LightShape

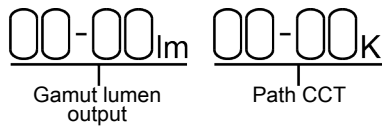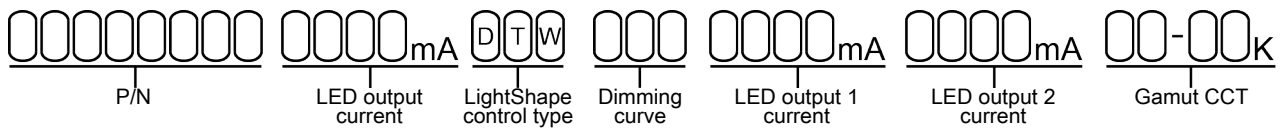

| | |
|--------------------------------|---|
| P/N | LED driver part number. |
| LED output current, Standard | Enter value in 1mA increments, e.g. "811" for 811mA |
| LED output current, LightShape | Output current identical for all outputs? Enter value in 1mA increments, e.g. "811" for 811mA and leave the fields "LED output 1" and "LED output 2" blank. Output current different per output? Enter "MCUR" in LED output current and specify the differing currents in LED output 1/2. |
| LightShape control type | "DTW" stands for Dim to Warm |
| Dimming curve | "LOG" for logarithmic (default) "LIN" for linear "SLN" for soft-linear "SQU" for square |
| Minimum dimming level | Leave blank for default minimum dimming level of 0.1%. Specify in 0.1% increments, e.g. "10.5" for 10.5%. |
| Start-up performance | Enter "CA24" for improved start-up performance to comply with ENERGY STAR Luminaires v2.0 and the latest CA Title 24 standard, effective January 2017. |
| Gamut CCT | LightShape-specific option. Enter the LEDs' CCT as "XX-YY" where XX is LED output 1 and YY is LED output 2. Available options per output: 18, 20, 22, 25, 27, 30, 35, 40, 50, 57 and 65. E.g. "18-50" for 1800K on LED output 1 and 5000K on LED output 2. |

Gamut lumen output Enter the lumen output range for LED output 1 and 2 as "XX-YY" where XX is LED output 1 and YY is LED output 2. Available range per output: from "01" for 100lm to "99" for 9900lm. E.g. "10-12" for 1000lm on LED output 1 and 1200lm on LED output 2.

Path CCT Leave blank if Path CCT requires the same values as Gamut CCT. Or specify the Path CCT values as "XXYY" where XX is LED output 1 and YY is LED output 2. Available options per output: 18, 20, 22, 25, 27, 30, 35, 40, 50, 57, 65. E.g. "18-50" for 1800K on LED output 1 and 5000K on LED output 2.

Input characteristics

Nominal input voltage range AC 120 - 277V (UL)

Absolute input voltage range AC 108 - 305V

Maximum input current
0.35A @ 120V / 60Hz
0.15A @ 277V / 60Hz

Input frequency range 50 - 60Hz

Efficiency at full load 83%

Power factor at full load >0.95

THD at full load <20%

Maximum inrush current
<200mA²s @ 120V / 60Hz
<200mA²s @ 277V / 60Hz


Surge protection
2kV differential mode (DM)
2kV common mode (CM)

Maximum standby power 0.5W

Output characteristics

| | |
|---------------------------------------|---|
| Maximum LED output power | 30W |
| Number of LED outputs | 2 |
| Programmable LED output current range | 150 - 1400mA |
| LED output type | Programmable in 1mA increments within specified current range |
| LED output current tolerance | +/- 5% at programmed LED output current |
| LED output voltage range | 15 - 42V |


Operating window

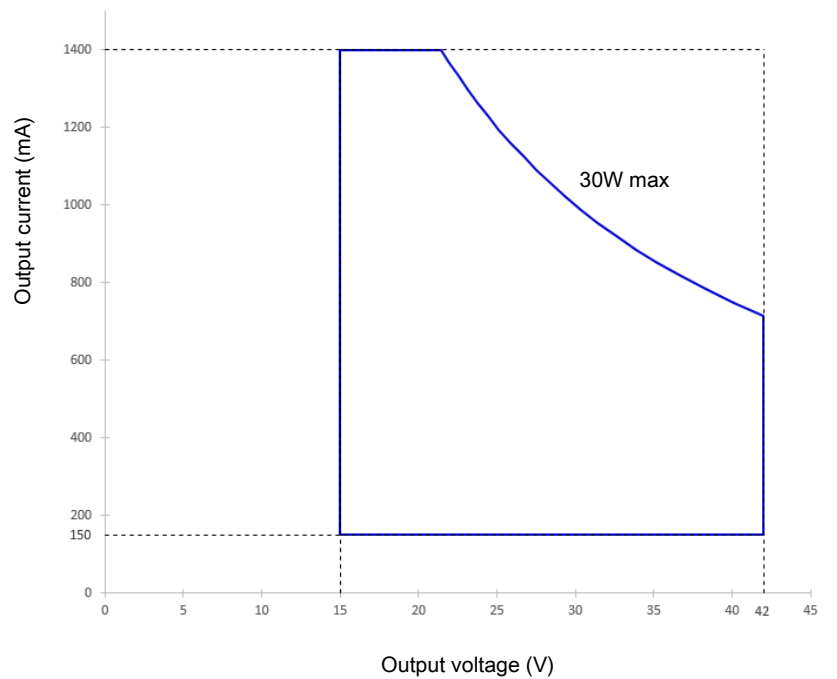


Control characteristics

| | |
|-----------------------|--|
| Control channels | 1 |
| Control protocol | 0-10V LEDcode |
| Dimming range | 100% - 0.1% |
| Dimming curve options | Logarithmic (default) Linear Soft-Linear Square |
| LightShape | Dim to Warm, 2x pc-white |
| Dimming method | Hybrid HydraDrive |
| 0-10V current draw | < 0.6mA |
| Time delay to standby | <30s |

0-10V dimming chart

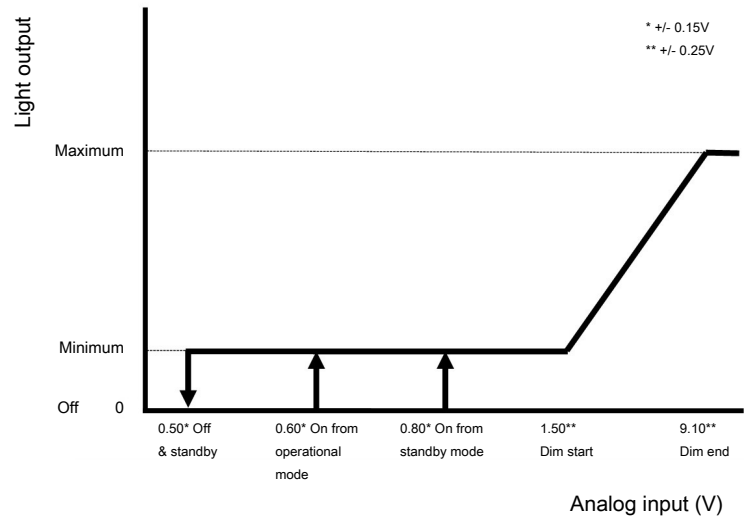


Dimming curves

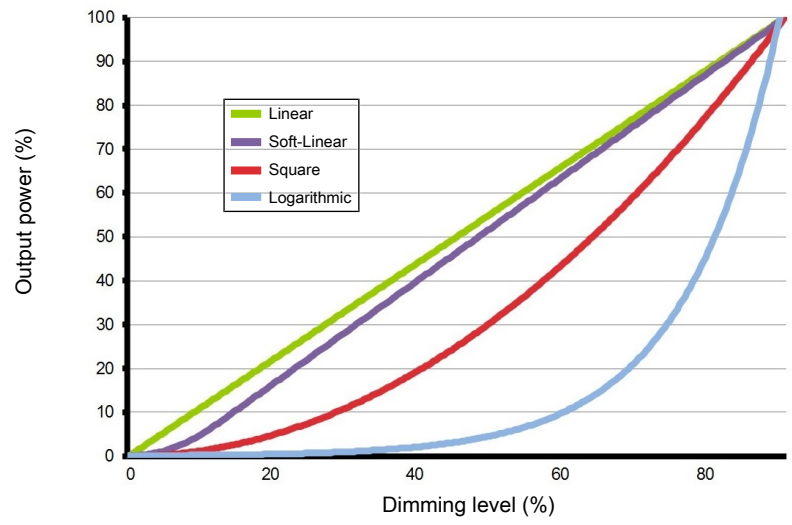

Performance


Typical efficiency vs load

Tested with a load on each LED output of 14 LEDs in series, programmed for 350mA and at 25 °C ambient temperature. The measurements below 30W were performed by dimming the light output.

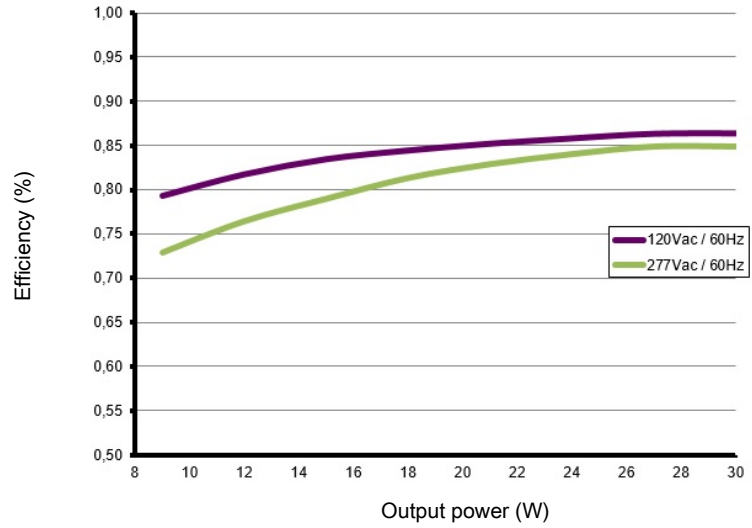


Typical power factor vs load

Tested with a load on each LED output of 14 LEDs in series, programmed for 350mA and at 25 °C ambient temperature. The measurements below 30W were performed by dimming the light output.

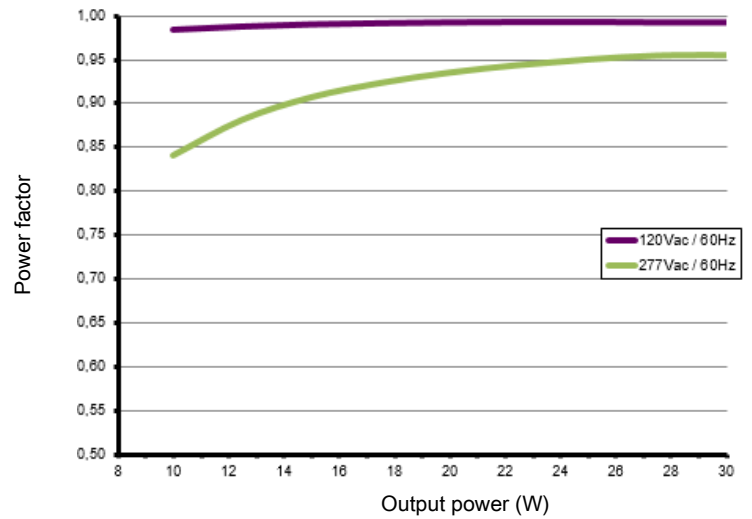


Typical THD vs load

Tested with a load on each LED output of 14 LEDs in series, programmed for 350mA and at 25 °C ambient temperature. The measurements below 30W were performed by dimming the light output.

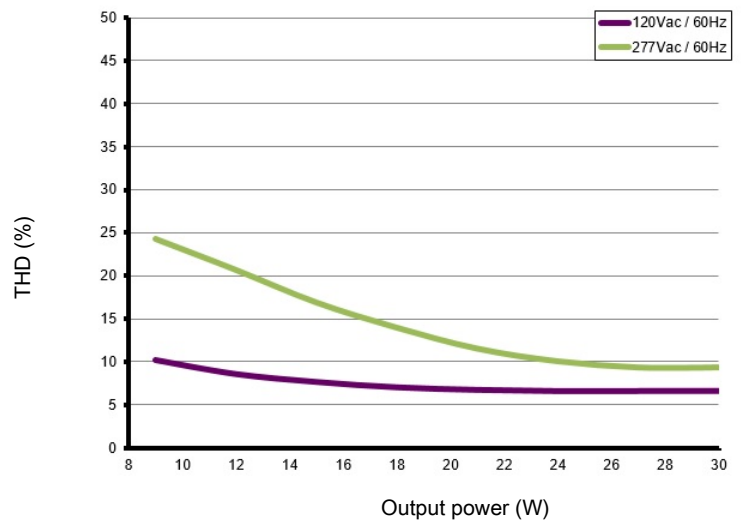

Typical flicker performance

Typical flicker percent as a function of frequency, measured across the dimming range. The results are overlaid with the low-risk (yellow) and no observable effect (green) levels as defined in IEEE P1789.

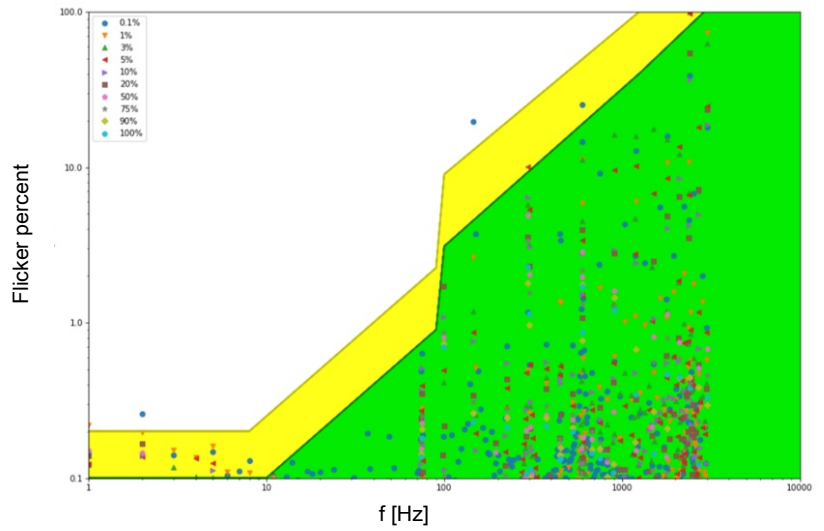


Environmental conditions

Operating ambient temperature (T_a) range -20 °C to +50 °C

Maximum operating case temperature (T_c max) 75 °C

Lifetime 50000 hours at a maximum case temperature (T_c) of 75 °C

TC point location

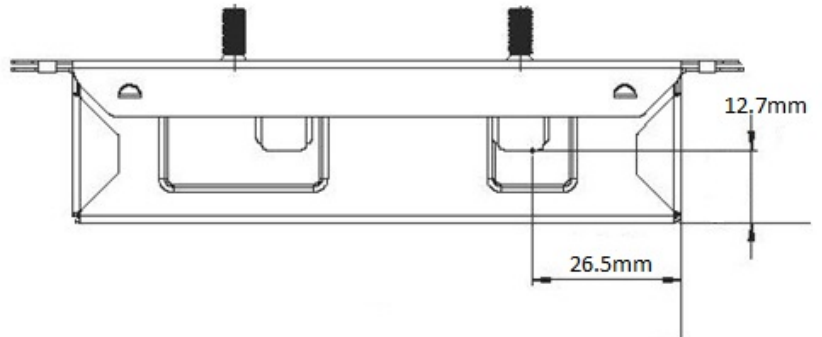


LED driver protection

| | |
|--------------------------|---|
| Thermal | The LED output current is decreased whenever the internal LED driver temperature exceeds factory preset temperature. The LED output current is increased again once the internal LED driver temperature drops below this internal temperature threshold. If the internal LED driver temperature continues to increase, despite a decrease in output current, the LED driver will shut down. |
| LED output short circuit | The LED output current is cut off whenever the LED driver detects a short-circuit. The LED driver will attempt a restart every 400ms after a short-circuit is detected. |
| LED output overload | The LED driver decreases the LED output current sequentially, until it reaches its maximum rated power, whenever a load that exceeds the LED driver's maximum rated power is connected to the LED output. |
| Reverse polarity | The LED driver will not yield any current if the polarity of the load on the LED output is reversed. This situation will not damage the LED driver but may damage the LED load. |

LED protection

| | |
|------------------------|---|
| Thermal protection LED | An external NTC thermistor, which is placed on a PCB near the LEDs, can be connected to the driver via the LEDcode/NTC terminals. The output current to the LEDs is then decreased by 75% whenever the NTC exceeds a maximum allowable temperature, which is specified by the user in the FluxTool software. The default NTC temperature limit is set to 70 °C. |
| Thermistor value | 47kΩ |
| Suitable thermistors | leaded: Vishay, P/N 238164063473 screw: Vishay, P/N NTCASCWE3473J |

LED driver mechanical details

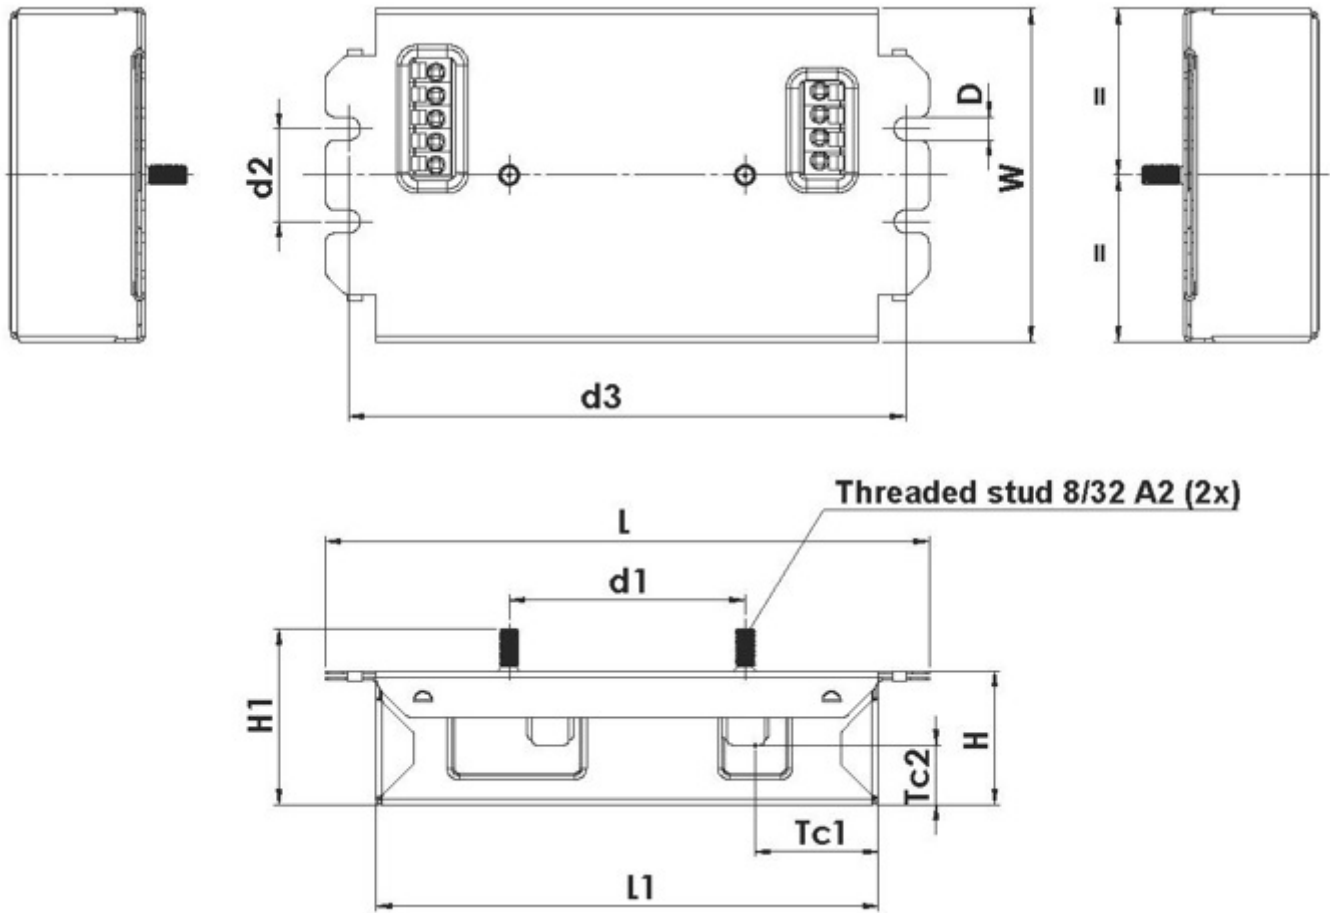

| | |
|---|--|
| Length (L) | typical: 130.0 mm / 5.12 in maximum: 132.0 mm / 5.20 in |
| Width (W) | typical: 72.4 mm / 2.85 in maximum: 73.7 mm / 2.90 in |
| Height (H) | typical: 29.0 mm / 1.14 in maximum: 29.7 mm / 1.17 in |
| Height including stud mounts (H1) | typical: 37.8 mm / 1.49 in maximum: 38.3 mm / 1.51 in |
| Mounting hole diameter (D) | typical: 5.0 mm / 0.20 in maximum: 5.3 mm / 0.21 in |
| Center to center stud mount distance (d1) | typical: 50.8 mm / 2 in maximum: 51.0 mm / 2.01 in |

| | |
|--|--|
| Center to center mounting hole distance (d2) | typical: 20.0 mm / 0.79 in maximum: 20.2 mm / 0.80 in |
| Center to center mounting hole distance (d3) | typical: 120.0 mm / 4.72 in maximum: 122.0 mm / 4.80 in |
| Length excluding flanges (L1) | typical: 108.8 mm / 4.26 in maximum: 110.8 mm / 4.36 in |
| 3D files available on product web page | IGS STEP |
| Weight | 282 g |
| Mounting torque | Not to exceed 0.5Nm |

Packaging

| | |
|-----------------------------|--------------------------|
| Length x Width x Height | 130x108x38 mm / 5x4x1 in |
| Weight (including products) | 12 kg |
| Products per box | 40 pcs |

Connector layout



Input wiring specifications

| | |
|-------------------------------|---------------------------------------|
| Connector type | push-in terminals |
| Connector supplier and series | DECA MWX420-500A series |
| Wire type | solid copper |
| Wire core cross section | 0.5 - 1.5 mm ² AWG 20 – 16 |
| Wire strip length | 9.0 mm |

Output wiring specifications

| | |
|--|--|
| Connector type | push-in terminals |
| Connector supplier and series | DECA MWX420-500A series |
| Wire type | solid copper |
| Wire core cross section | 0.5 - 1.5 mm ² AWG 20 – 16 |
| Wire strip length | 9.0 mm |
| Maximum remote mounting distance of LED load | AWG 20 (0.52 mm ²) - 14 m / 46 ft AWG 19 (0.65 mm ²) - 18 m / 59 ft AWG 18 (0.82 mm ²) - 22 m / 72 ft AWG 17 (1.04 mm ²) - 28 m / 92 ft AWG 16 (1.31 mm ²) - 36 m / 118 ft |

Automatic circuit breakers (MCB)

| | | | | | | | |
|-----------------|-----------------------|-----|-----|-----|-----|-----|-----|
| Maximum loading | MCB type | B10 | B13 | B16 | C10 | C13 | C16 |
| | Number of LED drivers | 33 | 43 | 53 | 33 | 43 | 53 |

Standards and compliance

| | |
|-------------------------------------|---|
| UL Listed, Class P | UL 1310 UL 8750 (Class 2 output) |
| Conducted emissions | FCC title 47 CFR part 15 class A (@ 277Vac) FCC title 47 CFR part 15 class B (@ 120Vac) |
| Radiated emissions | FCC title 47 CFR part 15 class A (@ 277Vac) FCC title 47 CFR part 15 class B (@ 120Vac) |
| Electrostatic discharge | EN 61000-4-2 |
| 0-10V | IEC/EN 60929 annex E NOTE: From 0.6V to 10V eldoLED LED drivers comply with IEC/EN 60929 annex E. Below 0.6V eldoLED LED drivers comply with ABL 0-10V Design Spec v1.2 enabling standby mode. For detailed dimming characteristics see 0-10V response chart in Control Characteristics. |
| Surge protection | ANSI 62.41 1991 category B1: 2.5kV DM, 2.5kV CM @ 30 Ohm 0-10V input: 0.5 kV DM, 1 kV CM surge |
| Restriction of hazardous substances | RoHS3 (Directives 2011/65/EU-2015/863/EU) |
| SVHC-list substances | REACH Art.33 |

Certifications



Safety



Risk of electrical shock. May result in serious injury or death. Disconnect power before servicing or installing.



The LED driver may only be connected and installed by a qualified electrician. All applicable regulations, legislation, and building codes must be observed. Incorrect installation of the LED driver can cause irreparable damage to the LED driver and the connected LEDs.

Pay attention when connecting the LEDs: polarity reversal results in no light output and often damages the LEDs.



LED drivers are designed and intended to operate LED loads only. Powering non-LED loads may push the LED driver outside its specified design limits and is, therefore, not covered by any warranty.



eldoLED products are designed to meet the performance specifications as outlined at certain operating conditions in the data sheet. It is the responsibility of the fixture manufacturer to test and validate the design and operation of the system under expected and potential use cases, including faults.



Please observe voltage drop over long cable lengths. Longer cable lengths increase EMI susceptibility.



Product renderings and dimensional drawings are generic for the housing type. Product label, connector type and quantity may vary.

Europe, Rest of World

eldoLED B.V.
Science Park Eindhoven 5125
5692 ED Son
The Netherlands

E: info@eldoled.com
W: www.eldoled.com

North America

eldoLED America
One Lithonia Way
Conyers, GA 30012
USA

E: info@eldoled.com
W: www.eldoled.com
