

# Absolute encoders - bus interfaces

Through hollow shaft

DeviceNet / 13 bit ST / 16 bit MT / Speed switch

Number of pulses and switching speed freely programmable

## HMG10P-T - DeviceNet



HMG10P-T - picture similar

### Features

- Interface DeviceNet
- Magnetic sensing method
- Resolution: singleturn 13 bit, multiturn 16 bit
- Function display via LEDs
- Multiturn sensing with Energy Harvesting technology, without gear or battery
- Two-sided bearing system with hybrid bearings
- Special protection against corrosion C5-M

### Optional

- Integrated speed switch programmable
- Additional output incremental programmable

### Technical data - electrical ratings

Voltage supply	10...30 VDC
Short-circuit proof	Yes
Consumption w/o load	≤200 mA
Initializing time	≤500 ms after power on
Interface	DeviceNet
Function	Multiturn
Transmission rate	125...500 kBaud
Device address	Rotary switches in bus connecting box
Steps per revolution	8192 / 13 bit
Number of revolutions	65536 / 16 bit
Additional outputs	Square-wave TTL/HTL, TTL/RS422
Sensing method	Magnetic
Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3
Programming interface	RS485 (≤600 m)
Programmable parameters	Bus system: see bus features Additional output (number of pulses), switch-off and switch-on speeds
Diagnostic function	Position or parameter error
Status indicator	DUO-LED (bus connecting box) 4 LEDs in device back side
Approvals	CE, UL approval / E256710

### Technical data - electrical ratings (speed switches)

Switching accuracy	±2 % (or 1 Digit)
Switching outputs	1 output (Open collector, solid state relay on request)
Output switching capacity	30 VDC; ≤100 mA
Switching delay time	≤20 ms

### Technical data - mechanical design

Size (flange)	ø105 mm
Shaft type	ø16...20 mm (through hollow shaft)
Flange	Support plate, 360° freely positionable
Protection DIN EN 60529	IP 66/IP 67
Operating speed	≤6000 rpm
Range of switching speed	ns (off) = ±2...6000 rpm, factory setting 6000 rpm
Operating torque typ.	10 Ncm
Rotor moment of inertia	950 gcm <sup>2</sup>
Admitted shaft load	≤450 N axial ≤650 N radial
Materials	Housing: aluminium alloy Shaft: stainless steel
Corrosion protection	IEC 60068-2-52 Salt mist for ambient conditions C5-M (CX) according to ISO 12944-2
Operating temperature	-40...+85 °C
Relative humidity	95 % non-condensing
Resistance	IEC 60068-2-6 Vibration 30 g, 10-2000 Hz IEC 60068-2-27 Shock 400 g, 1 ms
Weight approx.	2.2 kg (depending on version)
Connection	Bus connecting box Terminal box incremental

# Absolute encoders - bus interfaces

Through hollow shaft

DeviceNet / 13 bit ST / 16 bit MT / Speed switch

Number of pulses and switching speed freely programmable

HMG10P-T - DeviceNet

## Part number

HMG10P 

	-T	H		.		DN	.3		00		.A
--	----	---	--	---	--	----	----	--	----	--	----

### Additional output

- 0 Without
- 5 1024 ppr\* TTL/HTL (Vin=Vout), 6 channels, electrically isolated
- 6 1024 ppr\* TTL/RS422, 6 channels

### Resolution multiturn

- 0 Without
- 6 16 bit

### Voltage supply / interface

DN 10...30 VDC, DeviceNet

### Connection

- F 1x bus connecting box with 3 cable glands M16, radial + 1x terminal box with 1 cable gland M20, radial
- Z 1x bus connecting box with 2 connectors M12, radial + 1x terminal box with 1 cable gland M20, radial

### Shaft diameter

- C ø16 mm, clamping ring on drive side
- F ø20 mm, clamping ring on drive side
- P ø16 mm, clamping ring on drive side with keyway

### Protection

- D IP 66 and IP 67, optimized for dusty environments
- L IP 66 and IP 67, optimized for oily and wet environments

### Flange

- H Support for torque arm, shaft insulation hybrid bearing

### Speed switch

- Without
- D With speed switch / switching speed 6000 rpm\*  
(Standard: Open collector, solid state relay on request)

\* Factory setting, programmable

# Absolute encoders - bus interfaces

Through hollow shaft


DeviceNet / 13 bit ST / 16 bit MT / Speed switch

Number of pulses and switching speed freely programmable

## HMG10P-T - DeviceNet


### DeviceNet - Terminal assignment

View A<sup>1)</sup> - View inside bus connecting box

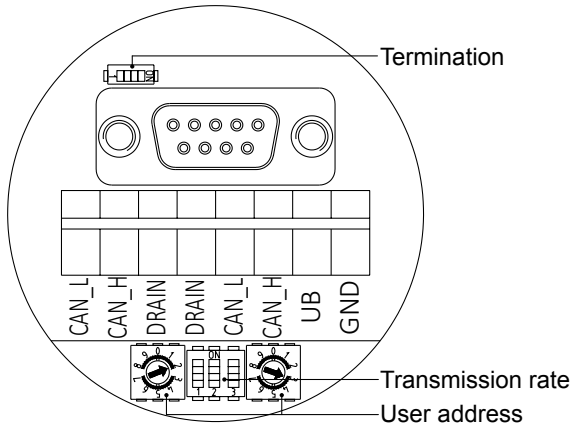


View A<sup>1)</sup> and A<sup>2)</sup> - View into connector

male / female	Connection	Description
1	DRAIN	Shield
2	UB	Voltage supply 10...30 VDC
3	GND	Ground for UB
4	CAN_H	CAN Bus signal (dominant HIGH)
5	CAN_L	CAN Bus signal (dominant LOW)



Connector M12 (male, A<sup>1)</sup>)  
5-pin, A-coded




Connector M12 (female, A<sup>2)</sup>)  
5-pin, A-coded

Terminals of the same significance are internally connected and identical in their functions. Max. load on the internal terminal connections UB-UB and GND-GND is 1 A each.

### DeviceNet - Features


Bus protocol	DeviceNet
Device profile	Device Profil for Encoders V 1.0
Operating modes	I/O-Polling Cyclic Change of State
Preset value	The „Preset“ parameter can be used to set the encoder to a pre-defined value that corresponds to a specific axis position of the system. The offset of encoder zero point and mechanical zero point is stored in the encoder.
Parameter functions	Rotating direction: The relationship between the rotating direction and rising or falling output code values can be set in the operating parameter. Scaling: The parameter values set the number of steps per turn and the overall resolution.
Diagnostic	The encoder supports the following error warnings: - Position and parameter error
Factory setting	User address 00

### DeviceNet - Termination



ON = final user  
OFF = user xx

### DeviceNet - User address



Defined by rotary switch.  
Example: User address 23

### DeviceNet - Transmission rate

Transmission rate	Dip switch position		
	1	2	3
125 kBaud*	X	OFF	OFF
250 kBaud	X	OFF	ON
500 kBaud	X	ON	OFF
125 kBaud	X	ON	ON

X = Without function  
\* Factory setting

<sup>1)</sup> See dimensions

# Absolute encoders - bus interfaces

Through hollow shaft

DeviceNet / 13 bit ST / 16 bit MT / Speed switch

Number of pulses and switching speed freely programmable


## HMG10P-T - DeviceNet

### Speed switch / additional output incremental - Terminal significance

Ub <sup>2)</sup>	Voltage supply
0V <sup>2)</sup>	Ground
A+ <sup>2)</sup>	Output signal channel 1
A- <sup>2)</sup>	Output signal channel 1 inverted
B+ <sup>2)</sup>	Output signal channel 2 (offset by 90° to channel 1)
B- <sup>2)</sup>	Output signal channel 2 inverted
R+ <sup>2)</sup>	Zero pulse (reference signal)
R- <sup>2)</sup>	Zero pulse inverted
nE+	System OK+ / error output
nE-	System OK- / error output inverted
SP+ <sup>3)</sup>	DSL_OUT1 / speed switch (Open collector, solid state relay on request)
SP- <sup>3)</sup>	DSL_OUT2 / speed switch (0V, solid state relay on request)
SA	RS485+ / programming interface
SB	RS485- / programming interface
dnu	Do not use

### Speed switch / additional output incremental - Terminal assignment terminal box

#### View B<sup>1)</sup>

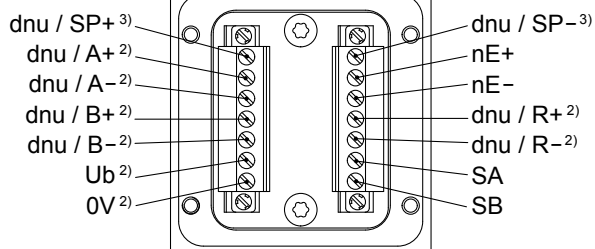

### Additional output incremental - Trigger level


Trigger level	TTL/RS422
High / Low	≥2.5 V / ≤0.5 V
Transmission length	≤550 m @ 100 kHz
Output frequency	≤600 kHz
Trigger level	TTL/HTL (Vin = Vout)
High / Low	≥2.5 V / ≤0.5 V (TTL) ≥Ub -3 V / ≤1.5 V (HTL)
Transmission length	≤550 m @ 100 kHz (TTL) ≤350 m @ 100 kHz (HTL)
Output frequency	≤600 kHz (TTL); ≤350 kHz (HTL)

Electrically isolated:  
The output TTL/HTL (Vin = Vout) at the additional output incremental is electrically isolated and requires a separate power supply.


- <sup>1)</sup> See dimensions
- <sup>2)</sup> Additional output incremental (option)
- <sup>3)</sup> Speed switch (option)

### Additional output incremental - Output signals

Version with additional output incremental at positive rotating direction<sup>1)</sup>

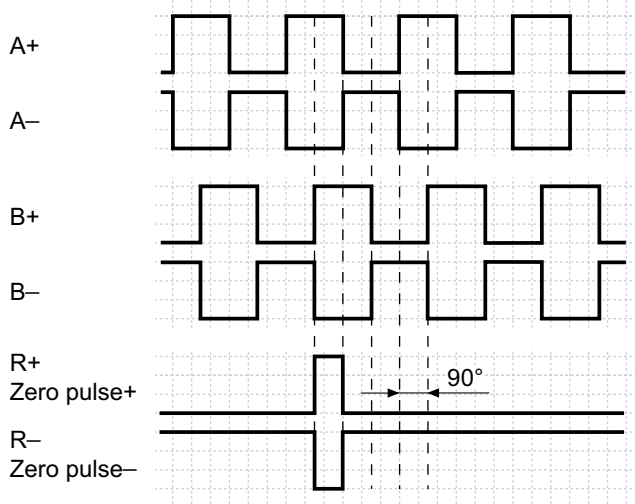

### Speed switch - Switching characteristics

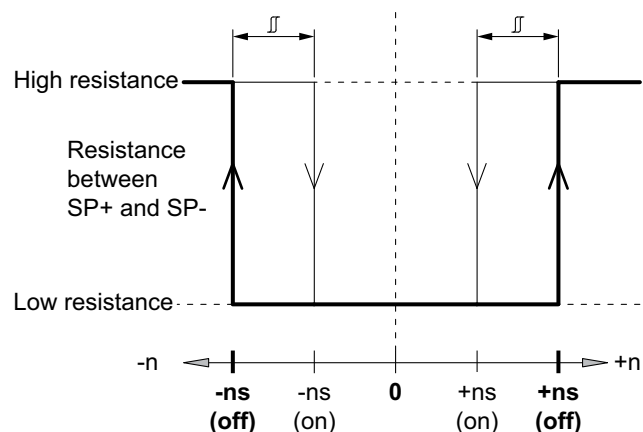

- n = Speed
- +ns (off) = Switch-off speed at shaft rotation in positive rotating direction<sup>1)</sup>.
- ns (off) = Switch-off speed at shaft rotation in negative rotating direction<sup>1)</sup>.

Switching hysteresis  $\overline{\overline{\quad}}$ :  
5...100 % (factory setting = 10 % min. 1 Digit)

- +ns (on) = Switch-on speed at shaft rotation in positive rotating direction<sup>1)</sup>.
- ns (on) = Switch-on speed at shaft rotation in negative rotating direction<sup>1)</sup>.

# Absolute encoders - bus interfaces

Through hollow shaft

DeviceNet / 13 bit ST / 16 bit MT / Speed switch

Number of pulses and switching speed freely programmable

## HMG10P-T - DeviceNet

---

### Accessories

#### Connectors and cables

11191145	Adapter cable for programming the HMG10P/PMG10P bus interfaces series D-SUB connector (male) 15-pin with connecting cable, D-SUB connector (male) 9-pin and 7-pin connecting terminal
----------	--

#### Mounting accessories

11043628	Torque arm M6, length 67-70 mm
11004078	Torque arm M6, length 120-130 mm (shortenable $\geq 71$ mm)
11002915	Torque arm M6, length 425-460 mm (shortenable $\geq 131$ mm)
11054917	Torque arm M6 insulated, length 67-70 mm
11072795	Torque arm M6 insulated, length 120-130 mm (shortenable $\geq 71$ mm)
11082677	Torque arm M6 insulated, length 425-460 mm (shortenable $\geq 131$ mm)
11077197	Mounting kit for torque arm size M6 and earthing strap
11077087	Mounting and dismounting set

#### Programming accessories

11190106	Z-PA.SDL.1 - WLAN-Adapter Programming unit for xMG10P series
----------	---

# Absolute encoders - bus interfaces

Through hollow shaft

DeviceNet / 13 bit ST / 16 bit MT / Speed switch

Number of pulses and switching speed freely programmable

HMG10P-T - DeviceNet

## Dimensions

