


Inductive proximity switch

IFFM 06 (short)

sample drawing

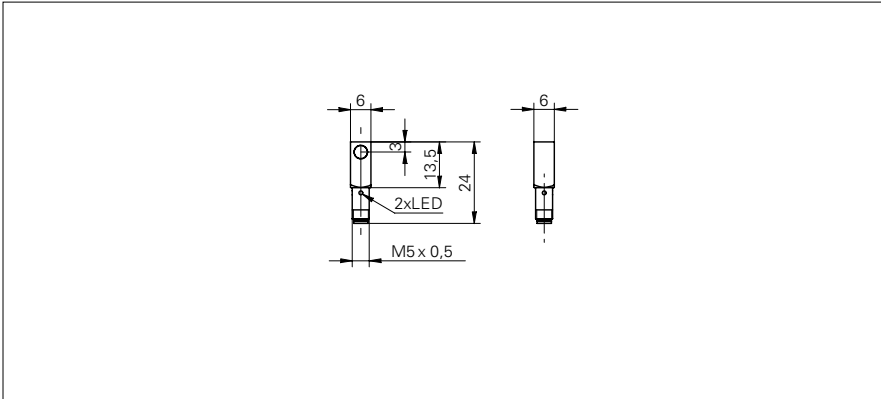

general data

mounting type	flush
nominal sensing distance S_n	1 mm
hysteresis	2 ... 20 % of S_r

electrical data

switching frequency	< 5 kHz
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	12 mA
voltage drop Vd	< 2 VDC
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	rectangular
material (sensing face)	LCP
housing material	brass nickel plated
dimension	6 mm

cable, 2 m

housing length	20 mm
----------------	-------

connector M5

housing length	24 mm
----------------	-------

ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67

sample picture



order reference	connection types	output circuit	output indicator
IFFM 06N15A3/O1L	cable, 2 m	NPN make function (NO)	LED red (backside)
IFFM 06N15A3/O1S05L	connector M5	NPN make function (NO)	2 port LED red
IFFM 06N35A3/O1L	cable, 2 m	NPN break function (NC)	LED red (backside)
IFFM 06N35A3/O1S05L	connector M5	NPN break function (NC)	2 port LED red
IFFM 06P15A3/O1L	cable, 2 m	PNP make function (NO)	LED red (backside)
IFFM 06P15A3/O1S05L	connector M5	PNP make function (NO)	2 port LED red
IFFM 06P35A3/O1L	cable, 2 m	PNP break function (NC)	LED red (backside)
IFFM 06P35A3/O1S05L	connector M5	PNP break function (NC)	2 port LED red