


# Ultrasonic distance measuring sensors

## UNDK 09 (RS232)

**sample drawing**

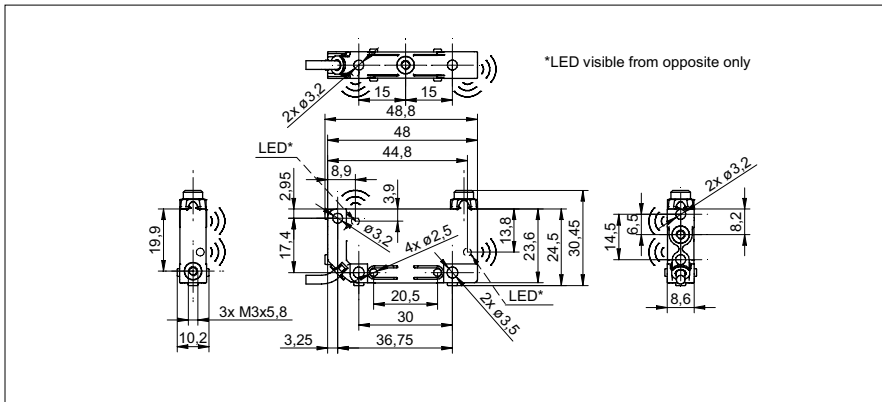

**general data**

scanning range sd	30 ... 200 mm
scanning range close limit Sdc	30 ... 200 mm
scanning range far limit Sde	30 ... 200 mm
repeat accuracy	< 0,5 mm
repeat accuracy (filter active)	< 0,1 mm
resolution	< 0,3 mm
resolution (filter active)	< 0,1 mm
response time ton	< 7 ms
temperature drift	< 0,18 % Sde/K (comp. off, factory set) < 2 % So (compensation on)
sonic frequency	380 kHz
alignment aid	target indication flashing
light indicator	yellow LED / red LED

**sample picture**



**electrical data**

voltage supply range +Vs	15 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	RS 232
baud rate	115200
residual ripple	< 10 % Vs
short circuit protection	yes
reverse polarity protection	yes, Vs to GND

**mechanical data**

type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	48,8 mm
depth	30,5 mm

**ambient conditions**

operating temperature	0 ... +60 °C
protection class	IP 67

**order reference**

<b>UNDK 09T9114</b>	cable PUR 4 x 0,08, 2 m
<b>UNDK 09T9114/KS35A</b>	flylead connector M8, L=200 mm

**connection types**