

Specification Submittal

SOLOdrive 1068/M

SOLOdrive

SOLOdrive offers industry-best Natural Dimming to dark - LED dimming made beautiful! With any dimmer, in any application. Symbiosis on SOLOdrive stands for unity, for the SOLOdrive working seamlessly together with LED modules, controls and intelligent luminaire elements.

Product offering

1	SOLOCIVE 1068/M Intelligent LED Driver/Controller Input current: 1.004 max LED output voltage: DC <80V LED output voltage: DC <80V LED output genergies 10-400mA (astitable) LED output genergies output: 77W max	AC 120-277V, 50-6044 Type TL C 120-277V, 50-6044 Type TL C 120-270V, 50-6044 TC +65 °C	SELV (€ 100 EL 200 Ta: -20 °C to +50 °C n: 87% typ PF: >0.9 THO: <20%	For operation with LEDs only For use in demo and dry locations Short-circuit proof control gear LED output UL class 2 Designed in EU & USA - Made in China	302-00437-001	\e+(LED OUDUR 1 - [* LED OUDUR 2 - [* LED OUDUR 2 - [* LEDOUDUR 2 - [*
	-		-		 	-	·

SOLOdrive 1068/M

Part number (P/N)	SL1068M1
Product description	SOLOdrive AC, 100W, LEDcode2 + AUX, 1 control channel, constant current, 2x 55V outputs, side feed, long metal

Features & benefits

Natural dimming	Dim to dark, smooth brightness changes, excellent flicker performance, adaptable dimming curves, configurable minimum dimming level
Symbiosis	Seamless interoperability with LED modules, controls and in-luminaire intelligent devices
LEDcode	LEDcode2 connects to integrated digital accessories, supports location-based loT applications and enables wired and wireless lighting control through LEDcode peripheral devices
Programmable	Fine-tune your driver for any application
Performance	Universal input voltage range, low inrush current and total harmonic distortion (THD), high power factor and efficiency
Camera compatibility	Hybrid HydraDrive technology is proven to work in TV studios and security camera environments

Project name:	Contact details:
Project number:	
LED driver order number:	

© 2019 eldoLED. All rights reserved. V1.0 All content contained herein is subject to change without prior notice. More product documentation and eldoLED's warranty and terms and conditions are available at www.eldoLED.com.




SOLOdrive 1068/M

Typical flicker performance

Typical flicker performance

Typical flicker percent as a function of frequency, measured across the dimming range. The results are overlaid with the low-risk (yellow) and no observable effect (green) levels as defined in IEEE P1789.

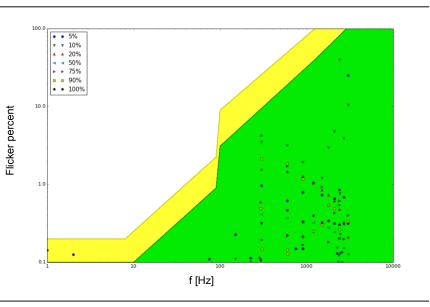

Electrical specifications

Driver type	constant current
Number of LED outputs	2 (UL Class 2)
Maximum LED output power	100W
Programmable LED output current range	150 - 1400mA
LED output type	Programmable in 1mA increments within specified current range
LED output voltage range	2 - 55V
Auxiliary output	15.5 - 25V DC, 18mA max
Nominal input voltage range AC	120 - 250V (ENEC), 120 - 277V (UL)
Nominal input voltage range DC	120 - 250V
Control protocol	LEDcode2
Control channels	1

Certifications





SOLOdrive 1068/M

Warranty

Warranty period

General Terms and Conditions

Length (L)	typical: 370 mm / 14.57 in
Width (W)	typical: 41 mm / 1.62 in
Height (H)	typical: 30 mm / 1.18 in
Weight	846 g
Products per box	25 pcs

Connector layout



Order number configurator

OOOOOOOO OOOmA P/N LED output current	
P/N	LED driver part number.
LED output current	Enter value in 1mA increments, e.g. "811" for 811mA



SOLOdrive 1068/M

Europe, Rest of World

eldoLED B.V. Science Park Eindhoven 5125 5692 ED Son The Netherlands

E: info@eldoled.com W: www.eldoled.com

North America

eldoLED America One Lithonia Way Conyers, GA 30012 USA

E: info@eldoled.com W: www.eldoled.com