


**LINEARdrive**

LINEARdrive gives you all the control you need for your low-voltage LED application. This constant voltage LED driver is DALI compatible and enables you to create the perfect shade of white or show sequence without an external controller. Symbiosis ensures the LED driver works seamlessly together with LED modules, controls and intelligent luminaire elements.


**Product offering**

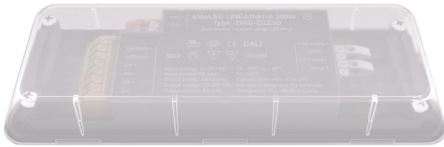

**LINEARdrive 210/D-BIS**

|                     |   |
|---------------------|---|
| Part number (P/N)   | LIN210D1-BIS  |
| Product description | LINEARdrive, 200W, DALI , 1 control channels, constant voltage, 2 outputs, plastic long |

**Order number configurator**



|     |                        |
|-----|------------------------|
| P/N | LED driver part number |
|-----|------------------------|

**Warranty**

|                 |  |
|-----------------|--|
| Warranty period | <a href="#">General Terms and Conditions</a> |
|-----------------|--|

|                          |                  |
|--------------------------|------------------|
| Project name:            | Contact details: |
| Project number:          |                  |
| LED driver order number: |                  |


## Electrical specifications

|                                |   |
|--------------------------------|---|
| Driver type                    | Constant voltage  |
| Number of LED outputs          | 2   |
| Maximum LED output power       | 200W  |
| LED output load                | 8A maximum, irrespective of whether using one or both LED outputs |
| LED output voltage             | 12 - 28V  |
| Auxiliary output voltage       | equal to input voltage  |
| Auxiliary output current       | 180mA @ 12V, 90mA @ 24V   |
| Maximum auxiliary output power | 2W  |
| Nominal input voltage DC       | 12 - 28V  |
| Maximum input current          | 8A, irrespective of PSU voltage                                   |
| Control protocol               | DALI version-1, Device Type 6                                     |
| Control channels               | 1   |

## Dimensions, weight, packaging

|                  |                           |
|------------------|---------------------------|
| Length (L)       | typical: 153 mm / 6.02 in |
| Width (W)        | typical: 50 mm / 1.97 in  |
| Height (H)       | typical: 23 mm / 0.91 in  |
| Weight           | 120 g                     |
| Products per box | 12 pcs                    |

## Connector layout

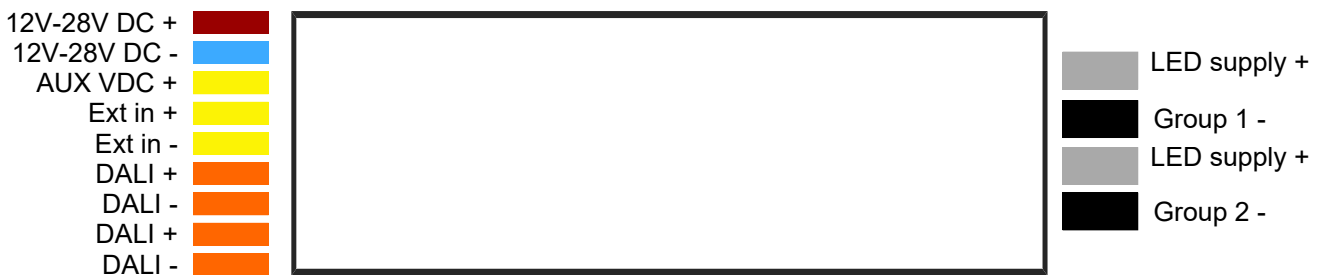

**Certifications**

---



---

**Europe, Rest of World**

eldoLED B.V.  
Science Park Eindhoven 5125  
5692 ED Son  
The Netherlands

E: [info@eldoled.com](mailto:info@eldoled.com)  
W: [www.eldoled.com](http://www.eldoled.com)

---

**North America**

eldoLED America  
One Lithonia Way  
Conyers, GA 30012  
USA

E: [info@eldoled.com](mailto:info@eldoled.com)  
W: [www.eldoled.com](http://www.eldoled.com)

---