


**Inductive proximity switch**

**IFFM 20P1501/S35L**

**dimension drawing**

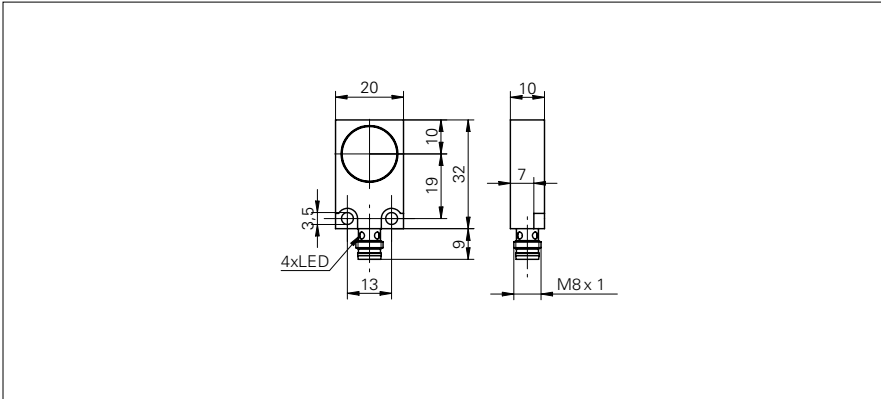

**general data**

mounting type	flush
nominal sensing distance $S_n$	5 mm
hysteresis	3 ... 20 % of $S_r$
output indicator	4 port LED red

**electrical data**

switching frequency	< 1 kHz
voltage supply range +Vs	10 ... 50 VDC
current consumption max. (no load)	10 mA
output circuit	PNP make function (NO)
voltage drop $V_d$	< 3 VDC
output current	< 200 mA
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

type	rectangular
material (sensing face)	PBT
housing material	brass nickel plated
dimension	20 mm
housing length	32 mm
connection types	connector M8

**ambient conditions**

operating temperature	-25 ... +75 °C
protection class	IP 67

**photo**



**connection diagram**



• voltage supply range 10-50 VDC