


**Copy counters**

**FLDM 170 (Laser, Scatec-15)**

**sample drawing**

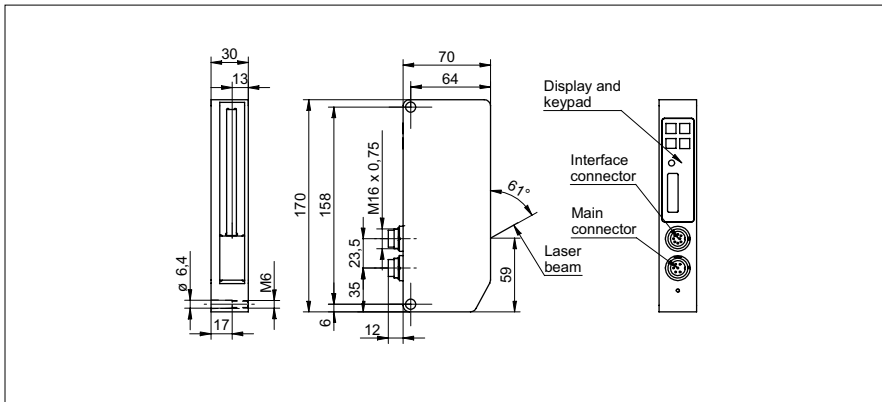

**general data**

measuring distance Sd	0 ... 120 mm
optimum operating distance	100 mm
counting rate	< 3000000 copies/h
object speed	< 5 m/sec
object cycle distance	> 1 mm
sensitivity	single sheet/edge thickness 0,15 mm
sync. input	yes
measuring point	visible red laser line 8 mm
light source	pulsed red laser diode
wave length	670 nm
laser class	2
edge indicator	LED yellow
power on indication	LED green
false pulse suppression	4 program options
direct gap detection	yes
sensitivity adjustment	4 preset levels or level set by customer

**electrical data**

voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	230 mA
output pulse length	0,3 ... 100 ms selectable
short circuit protection	yes
reverse polarity protection	yes
interface	serial for ScaDiag software

**mechanical data**

width / diameter	30 mm
type	rectangular
housing material	die-cast zinc
connector base (main connector)	DIN 45322, 6 pin
connector base (interface)	DIN 45326, 8 pin
front (optics)	glass


**ambient conditions**

operating temperature	0 ... +50 °C
protection class	IP 54

**sample picture**



**laser warning**

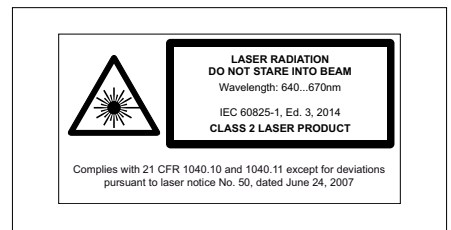

**Copy counters****FLDM 170 (Laser, Scatec-15)**

<b>order reference</b>	<b>output circuit</b>
FLDM 170C1030/S42	opto isolated
FLDM 170G1030/S42	push-pull