


# SmartReflect Light barriers

## FNCK 07

**sample drawing**

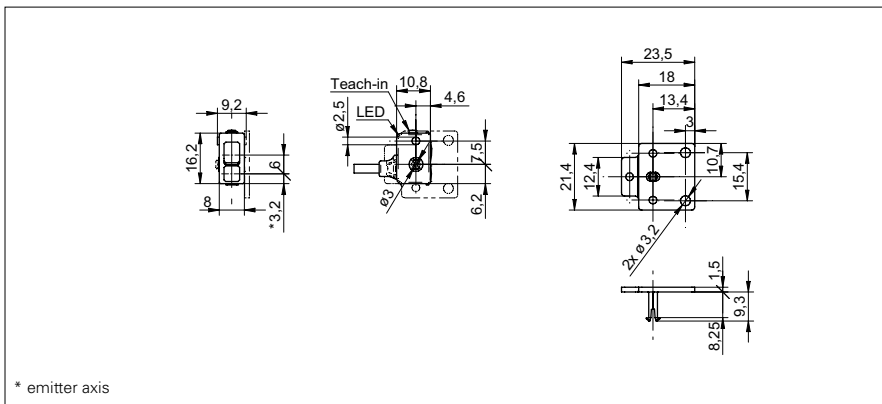

**general data**

type	light barrier
light source	pulsed red LED
background position Sde	17 ... 45 mm
scanning range Sa	82% Sde
light indicator	LED green
output indicator	LED yellow
sensing distance adjustment	Teach-in
wave length	660 nm
suppression of reciprocal influence	yes

**electrical data**

response time / release time	< 0,5 ms
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	25 mA
current consumption typ.	20 mA
voltage drop Vd	< 1,8 VDC
output function	light / dark operate
output current	< 100 mA
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

width / diameter	8 mm
height / length	16,2 mm
depth	10,8 mm
type	rectangular
housing material	plastic (PMMA, MABS, PA)
front (optics)	PMMA

**ambient conditions**

operating temperature	-20 ... +50 °C
protection class	IP 65

**sample picture**



**SmartReflect Light barriers****FNCK 07**

<b>order reference</b>	<b>connection types</b>	<b>output circuit</b>
<b>FNCK 07N6910</b>	cable rear side, 2 m	NPN
<b>FNCK 07N6910/KS35A</b>	flylead connector M8 4 pin, L=200 mm	NPN
<b>FNCK 07P6910</b>	cable rear side, 2 m	PNP
<b>FNCK 07P6910/KS35A</b>	flylead connector M8 4 pin, L=200 mm	PNP