


ROHRflex PA 6-D

ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, thick-walled, fine or coarse profile, for heavy applications, VO (UL 94), EN 45545-2 (HL3)

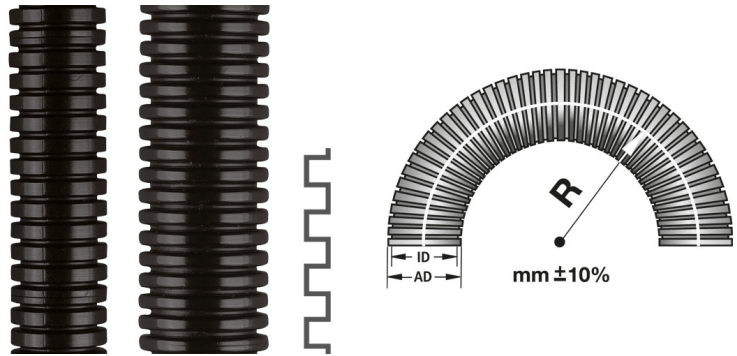

Temperature: -40°C ... +120°C ^ +150°C

Material: PA 6 plastics

Protection class [acc. to EN 60529]: IP 68 | IP 69K



FLEXA No.	Colour	OD [mm]	Profile	DI [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
0237.202.006	Black	10,0	fine	6,4	10,0	15	35	0,020	50
0237.202.010	Black	13,0	fine	9,6	12,9	25	45	0,030	50
0237.202.012	Black	15,8	fine	11,8	15,7	35	55	0,040	50
0237.202.014	Black	18,5	fine	13,8	18,2	40	65	0,060	50
0237.202.016	Black	21,2	fine	16,1	21,2	50	75	0,080	50
0237.202.023	Black	28,5	fine	22,5	28,4	60	100	0,130	50
0237.202.029	Black	34,5	fine	28,5	34,4	70	120	0,150	25
0237.202.036	Black	42,5	fine	35,6	42,6	100	150	0,200	25
0237.202.048	Black	54,5	fine	47,5	54,5	110	190	0,260	25
0237.232.016	Black	21,2	coarse	16,0	21,2	50	75	0,070	50
0237.232.023	Black	28,5	coarse	21,4	28,5	60	100	0,120	50
0237.232.029	Black	34,5	coarse	27,1	34,3	70	120	0,160	25
0237.232.036	Black	42,5	coarse	34,8	42,2	100	150	0,180	25
0237.232.048	Black	54,5	coarse	47,0	54,2	110	190	0,260	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.