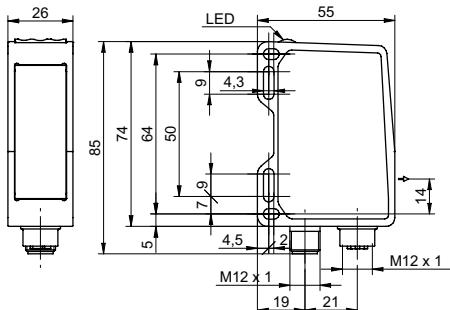



Light-section sensors**OXH7-11185166****dimension drawing****general data**

type	height
version	PosCon OXH7
measuring range (width)	48 ... 72 mm
measuring range (distance)	100 ... 150 mm
measuring frequency	570 Hz
resolution	2 ... 4 µm
linearity error	± 30 ... ± 90 µm
temperature drift	± 0,04 % Sde/K
power on indication	LED green
output indicator	LED yellow / LED red
ethernet link indication	LED blue
light source	pulsed red laser diode
wave length	656 nm
laser class	1
optical peak power max.	3 mW
adjustment	Webserver, Ethernet TCP/IP

photo**electrical data**

response time / release time	3,5 ms
voltage supply range +Vs	15 ... 28 VDC
current consumption max. (no load)	150 mA
switching output	push-pull
output current	< 100 mA
interface	Ethernet TCP/IP
reverse polarity protection	yes, Vs to GND
short circuit protection	yes
protocol	Modbus TCP, OPC UA
webserver	yes

connection diagram**laser warning**

CLASS 1 LASER PRODUCT

IEC 60825-1/2014
Complies with 21 CFR 1040.10 and 1040.11
except for deviations pursuant to laser
notice No. 50, dated June 24, 2007

mechanical data

width / diameter	26 mm
height / length	74 mm
depth	55 mm
type	rectangular, front view
housing material	aluminum
front (optics)	glass
connection types	connector M12 8 pin & M12 4 pin
weight	135 g

Light-section sensors**OXH7-11185166****ambient conditions**

ambient light immunity	< 35 kLux
operating temperature	-10 ... +50 °C
protection class	IP 67
storage temperature	-20 ... +60 °C
vibration (sinusoidal)	IEC 60068-2-6:2008 1.5 mm p-p at f = 10 - 57 Hz, 10 cycles per axis 10 g at f = 58 - 2000 Hz, 10 cycles per axis
shock (semi-sinusoidal)	IEC 60068-2-27:2009 30 g / 11 ms, 6 jolts per axis and direction



- Conditions for the following characteristics:
 - measuring frequency 2) 3)
 - resolution 1) 2) 4) 5)
 - linearity error 1) 2) 4)
 - temperature drift 1) 2) 4)
 - response time / release time 2) 3)
- 1) Measurement with Baumer standardized measuring equipment and targets depending on measuring range (distance)
- 2) Measurement on 90% remission (white)
- 3) Measurement with reduced Field of View (start of measurement range 140 mm, end of measurement range 150 mm)
- 4) Measurement with measuring type average
- 5) Measurement with filtering