

Overview

- Excellent accuracy and active temperature compensation for precise pressure measurements
- Measuring range from -0.1 ... 0.1 bar up to 0 ... 40 bar
- Universal field of applications due to fully welded and robust stainless steel housing
- ATEX approval
- Absolute pressure, relative pressure and vacuum measurement
- External programming of zero point and span with FlexProgrammer 9701



Technical data

Performance characteristics

Measuring range	-1 ... 40 bar
Min. measuring span	0.1 bar
Max. measuring span	40 bar
Pressure type	Absolute Relative (gauged)
Standard error of measurement (BFSL)	± 0.04 % FSR ± 0.1 % FSR ± 0.2 % FSR Including non-linearity, hysteresis and non-repeatability according BFSL
Max. measuring error	± 0.1 % FSR ± 0.25 % FSR ± 0.5 % FSR Including zero-point and span error, non-linearity (by terminal base line), hysteresis and non-repeatability (EN 61298-2) For turndown, multiply this value by the applied turndown ratio
Temperature coefficient	≤ 0.03 % FSR/10 K , measuring span ≤ 0.03 % FSR/10 K , zero point
Compensated temperature range	-40 ... 85 °C
Long term stability	≤ 0.1 % FSR/a , measuring range > 1 bar ≤ 1 mbar , measuring range ≤ 1 bar
Max. turndown ratio	5 : 1
Rise time (10 ... 90 %)	≤ 5 ms

Process conditions

Process pressure	Refer to section "Operating conditions"
Process temperature	-40 ... 120 °C

Process connection

Connection variants	Refer to section "Dimensional drawings"
Wetted parts material	AISI 316L (1.4404)

Process connection

Wetted parts material, gas-ket	FKM (Viton®) gaskets require a minimum ambient temperature of -20 °C and a minimum medium temperature of -25 °C NBR, optional
Wetted parts material, membrane	AISI 316L (1.4435)

Ambient conditions

Bump (EN 60068-2-27)	100 g / 2 ms, 4000 impulses per axis and direction
Shock (EN 60068-2-27)	50 g / 11 ms, 100 g / 6 ms, 10 impulses per axis and direction
Vibration (sinusoidal) (EN 60068-2-6)	1.5 mm p-p (10 ... 58 Hz), 10 g (58 Hz ... 2 kHz), 10 cycles (2.5 h) per axis
Vibration, broad-band random (EN 60068-2-64)	0.1 g ² / Hz, > 10 gRMS (20 Hz ... 1 kHz), 30 min. per axis
Degree of protection (EN 60529)	IP 65 , with connector DIN EN 175301-803 A (DIN 43650 A), 4-pin IP 67 , with cable outlet IP 67 , with connection head IP 67 , with connector M12-A. 4-pin
Insulation resistance	> 100 MΩ , 500 V DC
Operating temperature range	-40 ... 85 °C
Storage temperature range	-40 ... 85 °C

Output signal

Current output	4 ... 20 mA , 2-wire 20 ... 4 mA , 2-wire
Voltage output	0... 10 V , 3-wire 0... 5 V , 3-wire 0.5 ... 4.5 V , 3-wire 1 ... 5 V , 3-wire 10 ... 0V , 3-wire
Load resistance	≥ 5 kΩ
Short circuit protection	Yes

PBMN low pressure

PBMN-2#####2##0##/Article number: 96002599

Technical data

Output signal

 Shunt resistance $R_s \leq (V_s - 8 \text{ V})/0.0205 \text{ A}$
 $R_s \leq 750 \Omega, V_s = 24 \text{ V}$

Housing

 Overall size Refer to section "Dimensional drawings"
 Style Compact transmitter
 Material AISI 316L (1.4404)

Electrical connection

 Cable gland Cable $\varnothing 8 \dots 10$, stainless steel
 Cable outlet 1.5 m, 3-wire, shielded
 Connector DIN EN 175301-803 A (DIN 43650 A), 4-pin
 M12-A, 4-pin

Power supply

 Voltage supply range 13 ... 30 V DC , with voltage output
 8 ... 30 V DC , with current output

ATEX II 1/2G Ex ia IIC T4/T6 Ga/Gb

 Please note $-40 < T_{amb} < 70 \text{ }^\circ\text{C}$

 Maximum values for barrier selection, U_i 30 V DC , max.

 Maximum values for barrier selection, I_i 100 mA

 Maximum values for barrier selection, P_i 750 mW

 Internal capacitance, C_i 31 nF

 Internal inductance, L_i 3 μH

 Temperature class, T4 $-40 < T_{amb} < 85 \text{ }^\circ\text{C}$

ATEX II 1D Ex ia IIIC T107°C IP6X Da

 Please note For the application in Ex zone you have to respect the conditions mentioned in the ATEX Type Examination Certificate (SEV 11 ATEX 0129). You will find the relevant certificates and instructions at www.baumer.com

 Voltage supply range, U_n 30 V DC , max.

Degree of protection for cable accessories IP 65

 Temperature class, T107 °C $-40 < T_{amb} < 85 \text{ }^\circ\text{C}$

ATEX II 1G Ex ia IIC T4/T6 Ga

 Please note For the application in Ex zone you have to respect the conditions mentioned in the ATEX Type Examination Certificate (SEV 11 ATEX 0129). You will find the relevant certificates and instructions at www.baumer.com

 Maximum values for barrier selection, U_i 30 V DC , max.

 Maximum values for barrier selection, I_i 100 mA

 Maximum values for barrier selection, P_i 750 mW

 Internal capacitance, C_i 31 nF

 Internal inductance, L_i 3 μH

 Temperature class, T4 $-40 < T_{amb} < 85 \text{ }^\circ\text{C}$

 Temperature class, T6 $-40 < T_{amb} < 70 \text{ }^\circ\text{C}$

Compliance and approvals

 EMC EN 61000-6-2
 EN 61000-6-3
 EN 61326-2-3


 Explosion protection ATEX II 1/2G Ex ia IIC T4/T6 Ga/Gb
 ATEX II 1D Ex ia IIIC T107 °C IP6X Da
 ATEX II 1G Ex ia IIC T4/T6 Ga

Operating conditions


								Measuring range	Proof pressure	Burst Pressure		
								(bar)	(bar)	(bar)		
								0 ... 0,1	0 ... 0,16	0 ... 0,25	1	2
-0,1 ... 0,1	-0,2 ... 0,2	-1 ... 0	-1 ... 0,6	0 ... 0,4	0 ... 0,6	0 ... 1		3	6			
	-1 ... 1,5	-1 ... 3	-1 ... 5	0 ... 1,6	0 ... 2	0 ... 2,5	0 ... 4	15	30			
		-1 ... 9	-1 ... 15	0 ... 6	0 ... 10	0 ... 16	0 ... 20	60	120			
			-1 ... 24	0 ... 25				70	140			
			-1 ... 39	0 ... 40				135	270			

Dimensional drawings


Housing

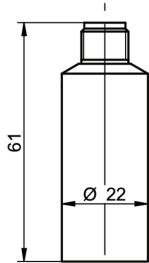


Housing with connector M12-A, 4-pin

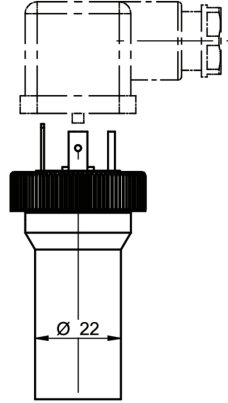

Housing with connector DIN EN 175301-803 A (DIN 43650 A), 4-pin

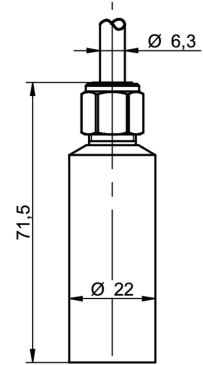


Housing with cable outlet, 3-wire, 1.5 m length

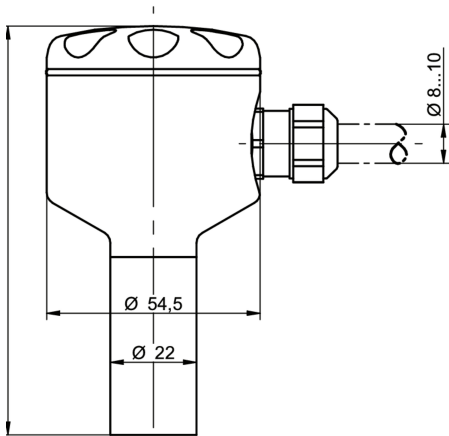


Field housing with cable gland


Process connection



G30-02
G 1/4 B EN 837-1 (BCID: G30)




G31-03
G 1/2 B EN 837-1 (BCID: G31)

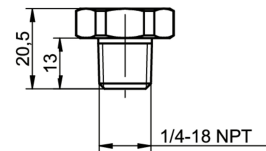


N01-04
1/4-18 NPT (BCID: N01)


Process connection

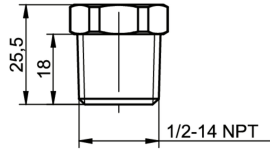


N02-05
1/2-14 NPT (BCID: N02)




G50-06
G 1/4 A DIN 3852-E (BCID: G50)



G51-09
G 1/2 A DIN 3852-E (BCID: G51)



G51-19
G 1/2 A DIN 3852-E, hole Ø 10 mm (BCID: G51)



G21-12
G 1/4 A ISO 228-1 female thread (BCID: G21)

PBMN low pressure

PBMN-2#####2##0##/Article number: 96002599

Electrical connection

Output signal	Equivalent circuit	Electrical connection	Function	Pin assignment
4 ... 20 mA (2-wire)			+Vs	1
			lout	3
			Frame Ground	Plug thread
			n.c.	2, 4
0 ... 10 V (3-wire)			+Vs	1
			Uout	2, 4
			GND (0 V)	3
			Frame Ground	Plug thread

Ordering information

Ordering key - Configuration possibilities see website

	PBMN - 2 # ### # ## ## ## 2 # # 0 # #
Product	PBMN
Housing material Stainless steel 1.4404 AISI 316L	2
Accuracy	
±0.5 % FS	3
±0.25 % FS	4
±0.10 % FS	5

PBMN low pressure

PBMN-2#####2##0##/Article number: 96002599

Ordering key - Configuration possibilities see website

	PBMN	-	2	#	###	#	##	##	##	2	#	#	0	#	#
Measuring range															
0...0,1 bar (EN)															B08
0...0,16 bar (EN)															B09
0 ... 0.25 bar (EN)															B10
0...0,4 bar (EN)															B11
0...0,6 bar (EN)															B12
0...1 bar (EN)															B15
0...1,6 bar (EN)															B16
0...2 bar (EN)															B17
0 ... 2.5 bar (EN)															B18
0 ... 4 bar (EN)															B19
0...12 bar (EN)															B1K
-1...39 bar (EN)															B1L
0 ... 6 bar (EN)															B20
0 ... 10 bar (EN)															B22
0 ... 16 bar (EN)															B24
0...20 bar (EN)															B25
0...25 bar (EN)															B26
0...40 bar (EN)															B27
-0,1...0,1 bar (EN)															B2H
-0,2...0,2 bar (EN)															B4G
-0,6...0 bar (EN)															B58
-1...0 bar (EN)															B59
-1...0,6 bar (EN)															B72
-1...1 bar (EN)															B73
-1...1,5 bar (EN)															B74
-1...2 bar (EN)															B75
-1...3 bar (EN)															B76
-1...5 bar (EN)															B77
-1...9 bar (EN)															B79
-1...15 bar (EN)															B81
-1...24 bar (EN)															B82
0...5 bar (EN)															B98
Kind of pressure															
Relative (gauged)															R
Absolute															A
Output signal															
20...4 mA															A0
4...20 mA															A1
0...10 V															A2
1...5 V															A3
0...5 V															A4
0.5...4.5 V															A5
10...0 V															A7
Output Connection															
M12-A, 4-pin															14
DIN EN 175301-803 A (DIN 43650 A), 4-pin															44
Cable outlet 1.5 m, 3-wire, shielded															53
Connection head, cable gland IP67															54

Ordering key - Configuration possibilities see website

	P	B	M	N	-	2	#	###	#	##	##	##	2	#	#	0	#	#
Process connection																		
G 1/4 B EN 837-1 (G30)																		02
G 1/2 B EN 837-1 (G31)																		03
1/4-18 NPT (N01)																		04
1/2-14 NPT (N02)																		05
G 1/4 A DIN 3852-E (G50)																		06
M20 × 1.5 ISO 261 / ISO 965 (M08)																		07
G 1/2 A DIN 3852-E (G51)																		09
G 1/4 A ISO 228-1 female thread (G21)																		12
G 1/2 A DIN 3852-E, hole Ø 10 mm (G52)																		19
G 1/4 B EN 837-1 with integrated damping element (P ≤ 600 bar) (G30)																		22
G 1/2 B EN 837-1 with integrated damping element (P ≤ 600 bar) (G31)																		23
1/4-18 NPT with integrated damping element (P ≤ 1000 bar) (N01)																		24
1/2-14 NPT with integrated damping element (P ≤ 1000 bar) (N02)																		25
G 1/4 A DIN 3852-E, pressure channel 0.6 mm (G50)																		26
G 1/2 A DIN 3852-E with integrated damping element (P ≤ 600 bar) (G51)																		29
Process connection material																		
Stainless steel 1.4404 AISI 316L																		2
Seal																		
None																		0
NBR standard																		1
FKM (Viton®)																		3
Oil filling																		
Standard oil																		1
NSF H1 listed (FDA approved)																		2
Display																		
Without display																		0
ATEX																		
Standard safety																		0
ATEX according to SEV 11 ATEX 0129																		1
Approvals																		
Standard approvals																		0
EAC																		7