


Overview

- Standard use in hydraulics from 10 to 1000 bar
- Robust stainless steel housing
- Compact design
- Fully welded, dry measuring cell
- Relative pressure measurement
- CANopen as option

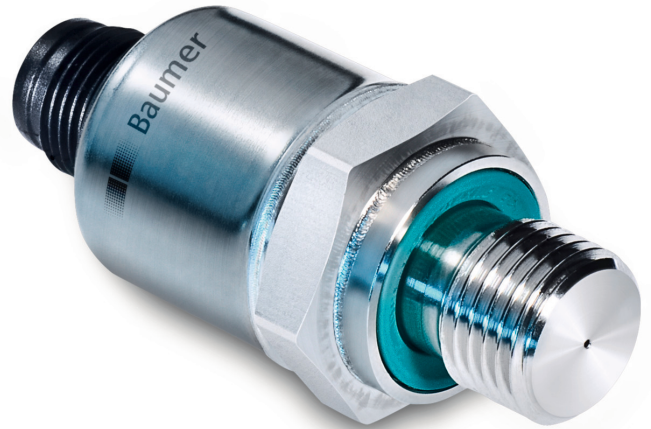

Technical data

Performance characteristics

Pressure type	Relative (gauged)
Compensated temperature range	0... 80 °C
Long term stability	≤ 0.2 % FSR/a
Max. measuring error	± 0.5 % FSR ± 1 % FSR, 0 ... 105 °C ± 1.5 % FSR, 105 ... 125 °C ± 1.5 % FSR, -40 ... 0 °C Including zero-point and span error, non-linearity (by terminal base line), hysteresis and non-repeatability (EN 61298-2)
Max. measuring span	1000 bar
Measuring range	0... 1000 bar
Standard error of measurement (BFSL)	± 0.2 % FSR ± 0.5 % FSR, 0 ... 105 °C ± 0.8 % FSR, -40 ... 0 °C ± 0.8 % FSR, 105 ... 125 °C Including non-linearity, hysteresis and non-repeatability according BFSL
Min. measuring span	10 bar
Rise time (10 ... 90 %)	≤ 1 ms

Process conditions

Process temperature	-40 ... 150 °C
Process pressure	Refer to section "Operating conditions"

Process connection

Connection variants	Refer to section "Dimensional drawings"
Wetted parts material, process connection	AISI 630 (1.4548)
Wetted parts material, membrane	AISI 630 (1.4548)

Ambient conditions

Operating temperature range	-40 ... 125 °C -25 ... 85 °C, with cable outlet
Storage temperature range	-40 ... 125 °C -25 ... 85 °C, with cable outlet

Ambient conditions

Degree of protection (EN 60529)	IP 67
Shock (EN 60068-2-27)	500 g
Vibration (sinusoidal) (EN 60068-2-6)	20 g

Output signal

Current output	4 ... 20 mA, 2-wire
Output signal	CANopen
Voltage output	0... 10 V, 3-wire 0... 5 V, 3-wire 0.5 ... 4.5 V, 3-wire 0.5 ... 4.5 V DC ratiometric, 3-wire 1 ... 6 V, 3-wire
Short circuit protection	Yes

Housing

Style	Compact transmitter
Overall size	Refer to section "Dimensional drawings"
Material	AISI 304 (1.4301)

Electrical connection

Connector	AMP superseal 1.5, 3-pin Bayonet connection DIN 72585, 4-pin DT04, 3-pin M12-A, 5-pin DT04, 4-pin
Cable outlet	2 m, 3-wire

Power supply

Voltage supply range	9 ... 36 V DC, with 4 ... 20 mA output signal 14 ... 36 V DC, with 0 ... 10 V output signal 9 ... 36 V DC, with 1 ... 6 V output signal 9 ... 36 V DC, with 0 ... 5 V output signal 9 ... 36 V DC, with 0.5 ... 4.5 V output signal 5 V DC ratiometric, with 0.5 ... 4.5 V output signal
----------------------	---

Technical data

Compliance and approvals


EMC EN 61000-6-2
EN 61000-6-3

Operating conditions


Measuring range (bar)	Proof pressure (bar)	Burst Pressure (bar)
0 ... 10	40	60
0 ... 25	40	60
0 ... 60	100	500
0 ... 100	200	1000
0 ... 160	500	2500
0 ... 250	500	2500
0 ... 400	800	4000
0 ... 600	800	4000
0 ... 1000	1200	> 4000

Dimensional drawings


Housing

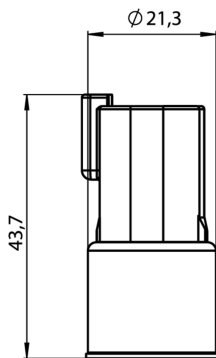


Housing with connector DT04, 4-pin




Housing with connector Bayonet connection
DIN 72585, 4-pin




Housing with connector M12-A, 5-pin

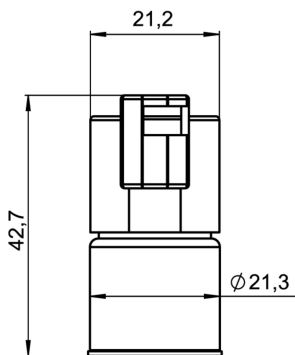

Housing with connector DT04, 3-pin




Housing with connector AMP superseal 1.5, 3-
pin

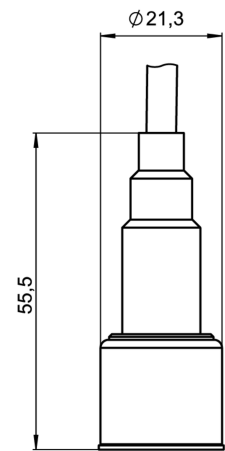


Housing with cable outlet, 3-wire

Dimensional drawings


Process connection




G 1/4 B EN 837-1 (BCID: G30)




1/4-18 NPT (BCID: N01)




G 1/4 A DIN 3852-E (BCID: G50)




G 1/4 A DIN 3852-E with \varnothing 0,6 mm pressure channel (BCID: G50)



7/16-20 UNF with cone (SAE 4) (BCID: U01)



7/16-20 UNF with O-ring (SAE 4) (BCID: U02)



9/16-18 UNF with O-ring (SAE 6) (BCID: U04)

PBM4

PBM4-13.###R.###.##6#

Electrical connection

Output signal	Equivalent circuit	Electrical connection	Function	Pin assignment							
Current output, 2-wire (e.g. 4 ... 20 mA)			<table border="1"> <tr><td>+Vs</td><td>1</td></tr> <tr><td>Iout</td><td>3</td></tr> <tr><td>n.c.</td><td>2, 4, 5</td></tr> </table>	+Vs	1	Iout	3	n.c.	2, 4, 5		
		+Vs	1								
		Iout	3								
		n.c.	2, 4, 5								
			<table border="1"> <tr><td>+Vs</td><td>1</td></tr> <tr><td>Iout</td><td>3</td></tr> <tr><td>Frame ground</td><td>Plug thread</td></tr> <tr><td>n.c.</td><td>2, 4, 5</td></tr> </table>	+Vs	1	Iout	3	Frame ground	Plug thread	n.c.	2, 4, 5
		+Vs	1								
		Iout	3								
		Frame ground	Plug thread								
n.c.	2, 4, 5										
	<table border="1"> <tr><td>+Vs</td><td>1</td></tr> <tr><td>Iout</td><td>2</td></tr> <tr><td>n.c.</td><td>3, 4</td></tr> </table>	+Vs	1	Iout	2	n.c.	3, 4				
+Vs	1										
Iout	2										
n.c.	3, 4										
	<table border="1"> <tr><td>+Vs</td><td>A</td></tr> <tr><td>Iout</td><td>C</td></tr> <tr><td>n.c.</td><td>B</td></tr> </table>	+Vs	A	Iout	C	n.c.	B				
+Vs	A										
Iout	C										
n.c.	B										
	<table border="1"> <tr><td>+Vs</td><td>3</td></tr> <tr><td>Iout</td><td>1</td></tr> <tr><td>n.c.</td><td>2</td></tr> </table>	+Vs	3	Iout	1	n.c.	2				
+Vs	3										
Iout	1										
n.c.	2										
	<table border="1"> <tr><td>+Vs</td><td>BN</td></tr> <tr><td>Iout</td><td>BU</td></tr> <tr><td>n.c.</td><td>BK</td></tr> </table>	+Vs	BN	Iout	BU	n.c.	BK				
+Vs	BN										
Iout	BU										
n.c.	BK										
	<table border="1"> <tr><td>+Vs</td><td>1</td></tr> <tr><td>Iout</td><td>2</td></tr> <tr><td>n.c.</td><td>3, 4</td></tr> </table>	+Vs	1	Iout	2	n.c.	3, 4				
+Vs	1										
Iout	2										
n.c.	3, 4										

PBM4

PBM4-13.###R.###.##6#

Electrical connection

Output signal	Equivalent circuit	Electrical connection	Function	Pin assignment
Voltage output, 3-wire (e.g. 0 ... 10 V)			+Vs	1
		Uout	4	
		GND (0 V)	3	
		n.c.	2, 5	
		+Vs	1	
		Uout	4	
		GND (0 V)	3	
Frame ground	Plug thread			
n.c.	2, 5			
+Vs	1			
Uout	3			
GND (0 V)	2			
n.c.	4			
+Vs	A			
Uout	B			
GND (0 V)	C			
+Vs	3			
Uout	2			
GND (0 V)	1			
+Vs	BN			
Uout	BK			
GND (0 V)	BU			
+Vs	1			
Uout	3			
GND (0 V)	2			
n.c.	4			

Ordering information

Ordering key - Configuration possibilities see website

	PBM4	-	1	3	.	###	R	.	##	##	.	##	6	#
Product	PBM4													
Housing material SS 1.4301 AISI 304				1										
Accuracy ±0.5 % FS												3		
Measuring range														
0 ... 10 bar (EN)													B22	
0...25 bar (EN)													B26	
0...60 bar (EN)													B29	
0...100 bar (EN)													B31	
0 ... 160 bar (EN)													B33	
0...250 bar (EN)													B35	
0...400 bar (EN)													B38	

Ordering information
Ordering key - Configuration possibilities see website
PBM4 - 1 3 . ### R . ## ## . ## 6 #

0...600 bar (EN)	B39								
0...1000 bar (EN)	B41								
0...400 psi (ANSI)	H26								
0...1000 psi (ANSI)	H30								
0...1500 psi (ANSI)	H31								
0...3000 psi (ANSI)	H34								
0...6000 psi (ANSI)	H38								
0...9000 psi (ANSI)	H39								
0...15000 psi (ANSI)	H41								
Kind of pressure									
Relative (gauged)							R		
Output signal									
4...20 mA								A1	
0...10 V								A2	
0...5 V								A4	
0.5...4.5 V								A5	
0.5...4.5 V ratiometric								A6	
1...6 V								A8	
CANopen								C2	
Output Connection									
M12-A, 5-pin									15
M12-A, 5-pin, stainless steel									16
Cable (2 m)									52
Bayonet connection DIN 72585, 4-pin									85
AMP Superseal 1.5, 3-pin									86
DT04, 4-pin									87
DT04, 3-pin									88
Process connection									
G 1/4 B EN 837-1 (G30)									02
1/4-18 NPT (N01)									04
G 1/4 A DIN 3852-E (G50)									06
G 1/4 A DIN 3852-E, pressure channel 0.6 mm (G50)									26
7/16-20 UNF cone (SAE 4) (U01)									34
7/16-20 UNF o-ring (SAE 4) (U02)									35
9/16-18 UNF o-ring (SAE 6) (U04)									36
Process connection material									
SS 1.4548 AISI 630									6
Seal									
None									0
FKM (Viton®)									3