


Diffuse sensors fiber optics

FUG 500C1Y00

dimension drawing

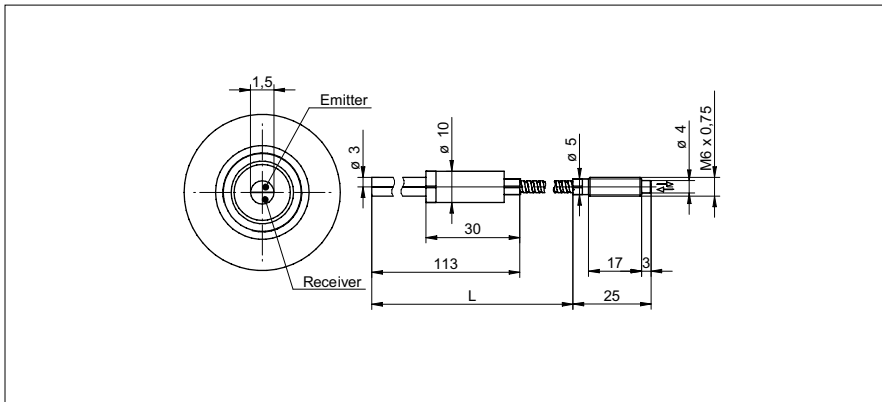

general data

particular characteristics	heat resistant
type	Diffuse sensors
sensing distance Tw	1 ... 160 mm
response time / release time	0,05 ... 5 ms
type of head (fiber optic cable)	cylindrical threaded (axial)
width / diameter (head)	6 mm
height / length (head)	25 mm
material (head)	stainless steel
bending radius	30 mm
cable jacket diameter	5 mm
material cable jacket	stainless steel
material (fiber optic cable)	glass
length (fiber optic cable)	5000 mm
operating temperature	-60 ... +350 °C

photo



Sensing distance/response time:  
For the definitive sensing distance/response time please see table below "fitting fiber optic sensors".



fitting fiber optic sensors	sensing distance Tw (0,05 ms)	sensing distance Tw (0,25 ms)	sensing distance Tw (1 ms)	sensing distance Tw (5 ms)
FVDK 67 (standard version)	1 ... 31 mm (HS)	-	1 ... 140 mm (nL)	1 ... 160 mm (HP)
FVDK 67 (2 adjustable outputs)	1 ... 31 mm (HS)	-	1 ... 140 mm (nL)	1 ... 160 mm (HP)
FVDK 67 (master/slave)	1 ... 31 mm (HS)	-	1 ... 140 mm (nL)	1 ... 160 mm (HP)
FVDK 66 (standard version)	-	1 ... 41 mm (FT)	1 ... 65 mm (nL)	-
FVDK 66 (master/slave)	-	1 ... 41 mm (FT)	1 ... 65 mm (nL)	-
FVDK 22	-	-	1 ... 51 mm (nL)	-
FVDK 12	-	-	1 ... 51 mm (nL)	-
FVDK 12 (fast version)	1 ... 48 mm (HS)	-	-	-
FVDK 10	-	-	1 ... 26 mm (nL)	-
FWDK 84 (analog output)	-	-	1 ... 13 mm (nL)	-

operating modes  
 HS High Speed  
 FT fast  
 nL Standard  
 HP High Sensitivity