


**Magnetic proximity switches**

**MFFM 08N3424/PL**

**dimension drawing**

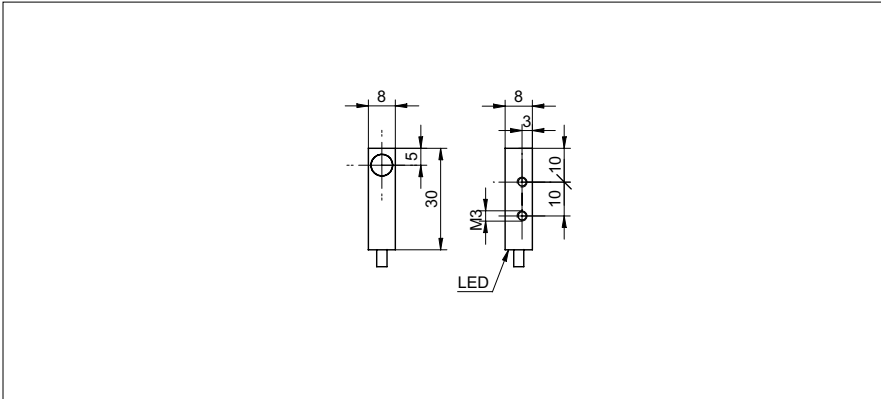

**general data**

type	magneto-resistive
nominal sensing distance Sn typ.	60 mm
output indicator	LED red
mounting type	flush
nominal operation point	2,5 mT
hysteresis	2 ... 20 % of Sr
repeat accuracy	< 1 % of Sr

**electrical data**

switching frequency	< 5 kHz
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	20 mA
voltage drop Vd	< 3 VDC
output current	< 150 mA
output circuit	NPN break function (NC)
short circuit protection	yes
reverse polarity protection	yes, Vs to GND

**mechanical data**

material (sensing face)	PBT
type	rectangular
dimension	8 mm
housing material	brass nickel plated
housing length	30 mm
connection types	cable PUR, 2 m


**ambient conditions**

operating temperature	-25 ... +75 °C
protection class	IP 67

**photo**



**connection diagram**

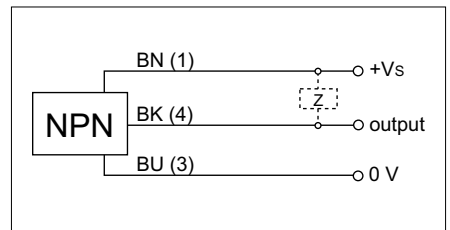

- nominal sensing distance Sn typ. in conjunction with permanent magnet 11053959 (available as an accessory)