

# Absolute encoders - SSI

Solid shaft  $\varnothing 10$  mm with clamping flange

Optical single- or multiturn encoders max. 14 bit ST / 24 bit MT

## ATD 2S B14 Y23



ATD 2S B14 Y23 with clamping flange

### Technical data - electrical ratings

Voltage supply	10...30 VDC
Reverse polarity protection	Yes
Consumption w/o load	$\leq 70$ mA (24 VDC)
Interfaces	SSI, SSI + incremental
Function	Singleturn, Multiturn
Steps per revolution	$\leq 16384$ / 14 bit
Number of revolutions	$\leq 16777216$ / 24 bit
Sensing method	Optical (singleturn) Magnetical (multiturn)
Code	Gray or binary
Code sequence	CW: ascending values with clockwise sense of rotation; looking at mounting surface CW/CCW be selectable by input V/R
Inputs	SSI clock Zero setting input
Output stages	SSI data: linedriver RS485 Diagnostic output: error
Incremental output	2048 pulses A90°B + inv. HTL (optional) 2048 pulses A90°B + inv. TTL (optional) 2048 sinewaves A, B, sine 1 Vpp (optional)
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3

### Features

- Encoder single- or multiturn / SSI
- Optical sensing singleturn, magnetical sensing multiturn
- Resolution: max. singleturn 14 bit, multiturn 24 bit
- Centering alignment  $\varnothing 36$  mm, mounting screw hole circle  $\varnothing 48$  mm
- Self-diagnostic
- Electronic zero point adjustment
- Flange connector radial

### Optional

- HTL or TTL incremental signals
- Sine signals

### Technical data - mechanical design

Size (flange)	$\varnothing 58$ mm
Shaft type	$\varnothing 10$ mm solid shaft (clamping flange)
Flange	Clamping flange
Protection DIN EN 60529	IP 65
Operating speed	$\leq 8000$ rpm (mechanical) $\leq 8000$ rpm (electric)
Starting torque	$\leq 0.012$ Nm (+20 °C)
Admitted shaft load	$\leq 20$ N axial $\leq 40$ N radial
Materials	Housing: aluminium Shaft: stainless steel
Operating temperature	-20...+85 °C
Relative humidity	90 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 55-2000 Hz DIN EN 60068-2-27 Shock 200 g, 6 ms
Weight approx.	380 g
Connection	Connector M23 type 2, 12-pin Connector M23 type 2, 17-pin

# Absolute encoders - SSI


## Solid shaft ø10 mm with clamping flange

### Optical single- or multiturn encoders max. 14 bit ST / 24 bit MT

**ATD 2S B14 Y23**

**Part number**

ATD 2S B14 Y23    SS       S 10 IP65

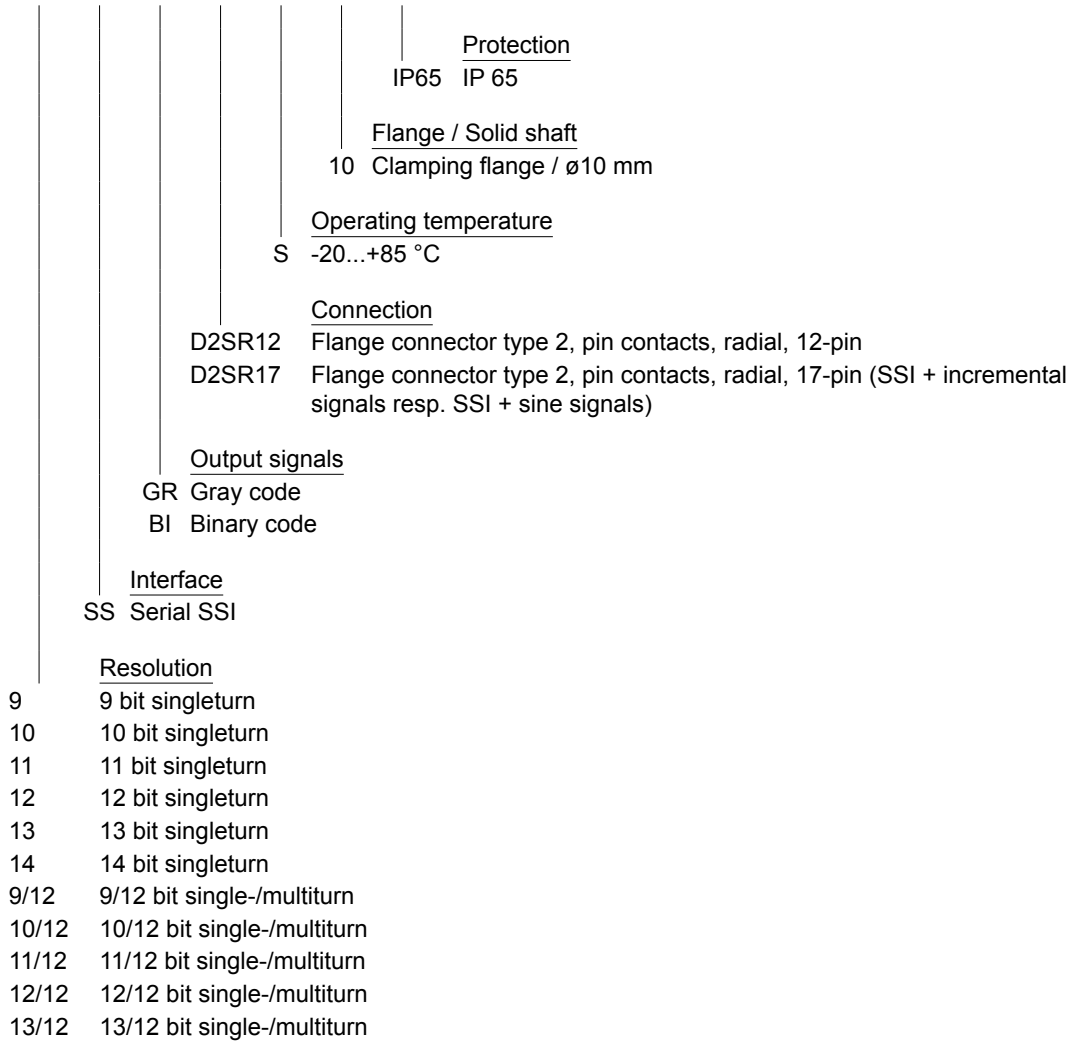

Other resolutions on request.

**Accessories**

**Connectors and cables**

11011122	Connector S2BG12, 1 m cable (ATD)
11071747	Connector S2BG12, 2 m cable (ATD)
11071749	Connector S2BG12, 5 m cable (ATD)
11070261	Connector S2BG17, 1 m cable (ATD)
11070262	Connector S2BG17, 2 m cable (ATD)
11070263	Connector S2BG17, 5 m cable (ATD)

# Absolute encoders - SSI


Solid shaft  $\varnothing 10$  mm with clamping flange

Optical single- or multiturn encoders max. 14 bit ST / 24 bit MT


## ATD 2S B14 Y23

Terminal significance	
UB	Encoder supply voltage.
GND	Encoder ground connection relating to UB.
Data+	Positive, serial data output of differential linedriver.
Data-	Negative, serial data output of differential-linedriver.
Clock+	Positive SSI clock input. Clock+ together with clock- forms a current loop. A current of approx. 7 mA towards clock+ input means logic 1 in positive logic.
Clock-	Negative SSI clock input. Clock- together with clock+ forms a current loop. A current of approx. 7 mA towards clock- input means logic 0 in positive logic.
Reset	Reset input for setting zero position value at any desired point within the entire resolution. The resetting process is triggered by apply of UB.
V/R	V/R counting direction input. This input is standard on High. V/R means increasing values with clockwise shaft rotation when looking at the mounting side (CW). V/R-Low means decreasing values with clockwise shaft rotation when looking at the mounting side (CCW).
Error	Diagnostic output (Open Collector with internal 10 k $\Omega$ pullup-resistor). The output is high-active, that means if no fault submitted, the output is to GND interconnected.

Terminal assignment	
<b>ATD 2S B14 Y23</b>	
Connector	Assignment
Pin 1	clock-
Pin 2	clock+
Pin 3	data+
Pin 4	data-
Pin 5	–
Pin 6	–
Pin 7	reset
Pin 8	V/R
Pin 9	– (do not use)
Pin 10	error
Pin 11	UB
Pin 12	GND



ATD 2S B14 Y23 with incremental output signals	
Connector	Assignment
Pin 1	clock-
Pin 2	clock+
Pin 3	data+
Pin 4	data-
Pin 5	–
Pin 6	–
Pin 7	reset
Pin 8	V/R
Pin 9	– (do not use)
Pin 10	error
Pin 11	UB
Pin 12	GND
Pin 13	–
Pin 14	track A+
Pin 15	track A-
Pin 16	track B+
Pin 17	track B-



# Absolute encoders - SSI

## Solid shaft $\varnothing 10$ mm with clamping flange

### Optical single- or multiturn encoders max. 14 bit ST / 24 bit MT

ATD 2S B14 Y23

#### Trigger level

SSI	Circuit
SSI-Clock	Optocoupler
SSI-Data	Linedriver RS485

#### Control input

Control input	Input circuit
Input level High	$\geq 0,7$ UB
Input level Low	$\leq 0,3$ UB
Input resistance	10 k $\Omega$

#### Diagnostic outputs

Diagnostic outputs	Output circuit
Output level	Open Collector with internal 10 k $\Omega$ PullUp-resistance

#### Incremental outputs HTL - Line Driver short-circuit proof

Output level High	$\geq$ UB -3 V
Output level Low	$\leq 0,5$ V
Load	$\leq 30$ mA


#### Incremental outputs TTL - Line Driver short-circuit proof

Output level High	$\geq 2,4$ V
Output level Low	$\leq 0,5$ V
Load	$\leq 30$ mA

#### Outputs


Outputs	Sine / Cosine
Output amplitude	1 V <sub>PP</sub> at Z <sub>0</sub> = 120 $\Omega$

#### Data transfer

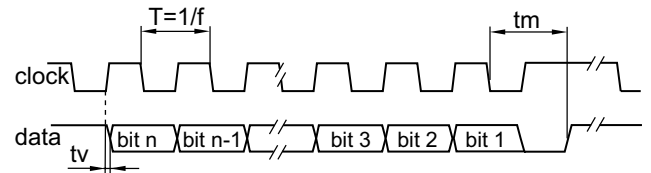

Clock frequency f	80...1000 kHz
Duty cycle of T	40...60 %
Delay time tv	150 ns
Monoflop time tm	20 $\mu$ s + T/2
Clock interval tp	26 $\mu$ s

#### Dimensions

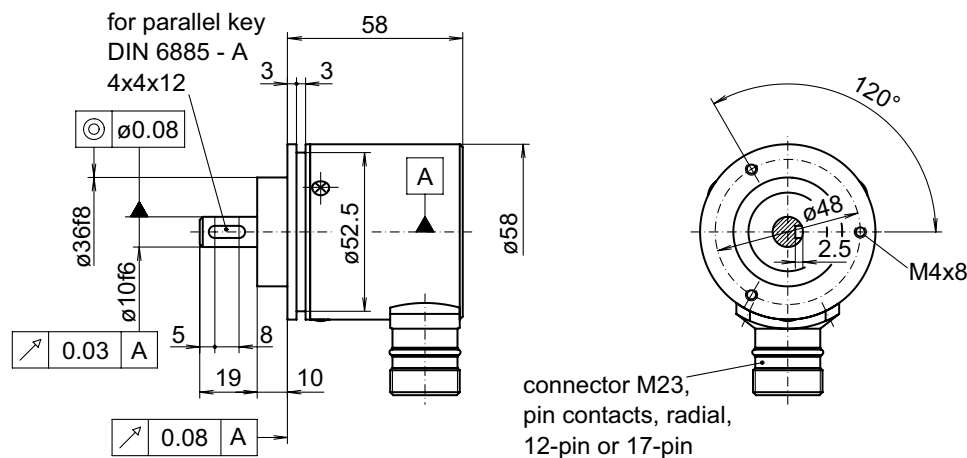

028- 7 Y23