

VS XC100M12X00EP

XC100

Article number: 11086399

overview

- Integrated flash controller
- User management
- Password protection
- Backup & Restore function
- Coordinate transformation
- flexible result conjunction
- Download *VeriSens*® Application Suite: www.baumer.com/vs-sw
- available



technical data

general data		electrical data	
resolution	1280 × 960 px	initial setup	Ethernet (10BASE-T / 100BASE-TX)
sensor type	1/3" CCD, monochrome	process interface	TCP/UDP (Ethernet)
illumination	direct connection (integrated flash controller)	visualization	web interface
illumination connection	as accessory	mechanical data	
high-resolution mode	max. 12 inspections per second	width	53 mm (without lens/tube)
high-speed mode (limited resolution)	max. 25 inspections per second	height	99,5 mm (without lens/tube)
number of jobs (products)	≤ 255	depth	49,8 mm (without lens/tube)
features per job	32	weight	≤ 300 g (without lens/tube)
signal processing	Baumer <i>FEX</i> ® 4.0	material	housing: aluminum cover glass: PMMA
defect image memory	8	environmental conditions	
lens	C-mount	operating temperature	+5 ... +50 °C
electrical data		storage temperature	-20 ... +70 °C
voltage supply range +Vs	18 ... 30 V DC	case temperature	max. +50 °C
power consumption	typical 5 W ($I_{max} = 1,5$ A at 24 V)	humidity	0 ... 90 % (non-condensing)
digital inputs	5 inputs (8 ... 30 V) trigger job selection external teach-in encoders (CH-A, CH-B) 500 kHz	protection class	IP 67 (with tube)
digital outputs	5 outputs (PNP) Pass / Fail Flash Sync Alarm Camera Ready Output Enable	vibration load	IEC 60068-2-6 IEC 60068-2-64
		mechanical shock resistance	EN 60068-2-27
		feature checks	
		part location	part location on contours part location on edges part location on circle part location on text line

technical data

feature checks

geometry	distance circle angle count edges point position edge characteristics
feature comparison	count contour points contour comparison brightness contrast area size count areas pattern comparison

integrated flash controller

voltage	12 V DC or 24 V DC (permanent) 24 V DC or 48 V DC (pulsed)
---------	---

integrated flash controller

current	$I_{max} = 800 \text{ mA}$ at 24 V DC (permanent) ($\pm 10 \%$, at least $\pm 100 \text{ mA}$, at 25 °C) $I_{max} = 4 \text{ A}$ at 48 V DC (pulsed) (+10/-20 %, at least $\pm 100 \text{ mA}$, at 25 °C)
flash time	max. 1 ms (Duty Cycle max. 1:10)

conformity

conformity	CE RoHS KC (R-R-BkR-VeriSens-XC-IP) EAC
------------	--


non-volatile memory

flash memory size	256 Mbit Flash S29GL256P10FFI010
-------------------	----------------------------------


Electrical connection



1: PWR (+18-30 V DC)	7: OUT3
2: Ground	8: IN3
3: IN1 (Trigger)	9: OUT4
4: OUT1	10: IN4
5: IN2	11: IN5
6: OUT2	12: OUT5




1: TD+	3: TD-
2: RD+	4: RD-




1: +24 V or +48 V Flash	3: Ground
2: +12 V or +24 V Flash	4: Flash Sync

voltage outputs configurable by software

dimension drawing

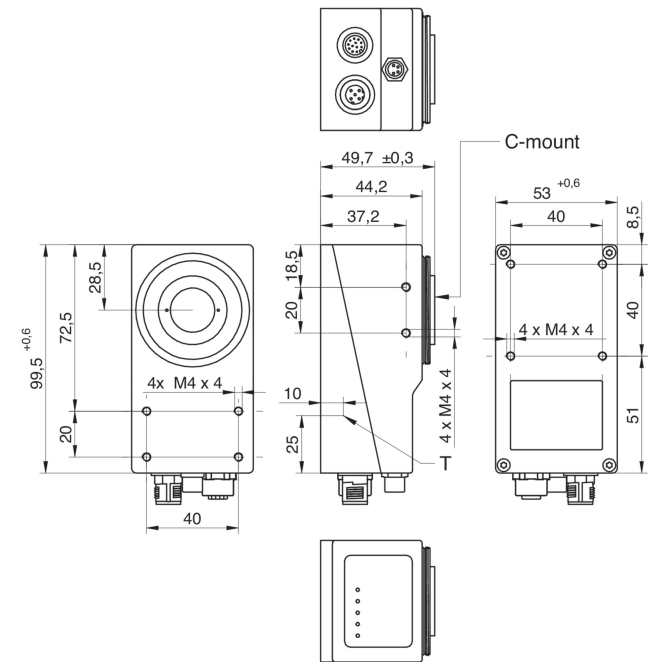

C-mount support



XC Tube, XC Tube Module

