


**Diffuse sensors fiber optics**

**FUE 200C2Y00**

**dimension drawing**

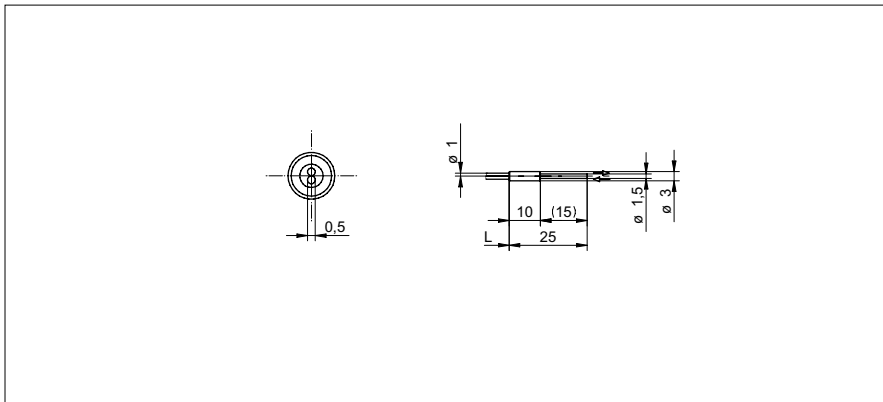

**general data**

particular characteristics	small sensing head
type	Diffuse sensors
sensing distance Tw	1 ... 86 mm
response time / release time	0,05 ... 5 ms
type of head (fiber optic cable)	cylindrical smooth (axial)
width / diameter (head)	3 mm
height / length (head)	25 mm
material (head)	stainless steel
bending radius	15 mm
cable jacket diameter	1 mm
material cable jacket	PE
material (fiber optic cable)	plastic
length (fiber optic cable)	2000 mm
operating temperature	-30 ... +70 °C

**photo**



Sensing distance/response time:  
For the definitive sensing distance/response time please see table below "fitting fiber optic sensors".



fitting fiber optic sensors	sensing distance Tw (0,05 ms)	sensing distance Tw (0,25 ms)	sensing distance Tw (1 ms)	sensing distance Tw (5 ms)
FVDK 67 (standard version)	1 ... 14 mm (HS)	-	1 ... 65 mm (nL)	1 ... 86 mm (HP)
FVDK 67 (2 adjustable outputs)	1 ... 14 mm (HS)	-	1 ... 65 mm (nL)	1 ... 86 mm (HP)
FVDK 67 (master/slave)	1 ... 14 mm (HS)	-	1 ... 65 mm (nL)	1 ... 86 mm (HP)
FVDK 66 (standard version)	-	1 ... 21 mm (FT)	1 ... 35 mm (nL)	-
FVDK 66 (master/slave)	-	1 ... 21 mm (FT)	1 ... 35 mm (nL)	-
FVDK 22	-	-	1 ... 35 mm (nL)	-
FVDK 12	-	-	1 ... 35 mm (nL)	-
FVDK 12 (fast version)	1 ... 33 mm (HS)	-	-	-
FVDK 10	-	-	1 ... 18 mm (nL)	-
FWDK 84 (analog output)	-	-	1 ... 9 mm (nL)	-

operating modes  
HS High Speed  
FT fast  
nL Standard  
HP High Sensitivity