



**BOURDON**  
The Original by Baumer



### Main Features

- For corrosive gasses and liquids
- Class 1 according to EN 837-1
- Wetted parts Stainless steel (MJX) or Monel (MMJ)
- Option : liquid-filled for applications with pulsations or vibrations
- Option : case material 1.4404 (316L) for aggressive atmosphere

### Applications

- Food & Beverage
- Laboratory & Medical
- Oil & Gas / Chemical
- Water & Waste water
- Energy
- Transportation & Logistics
- Machinery

### Technical Data

Nominal size	150 mm		Bezel ring	Stainless steel 1.4301 (AISI 304) Option : stainless steel 1.4404 (AISI 316L)
Measurement range	MJX :	-1 ... 0 to 0 ... 1600 bar	Movement	Stainless steel
	MMJ :	-1 ... 0 to 0 ... 600 bar	Window	Laminated safety glass
Pressure limitation			Window gasket	Elastomer
Ranges ≤ 600 bar	Steady :	100% of full scale value	Dial	Aluminium, white
	Fluctuating :	90% of full scale value	Pointer	Aluminium, black
	Short time :	130% of full scale value	Temperature	Ambient : -20 ... +70°C Medium : -40 ... +200°C (not filled) For liquid filled version see ordering details. The case temperature must not exceed +70°C Storage : -40 ... +70°C
Ranges ≥ 1000 bar	Steady :	75% of full scale value	Thermal drift	± 0.4% F.S. / 10 K (reference : 20°C)
	Fluctuating :	65% of full scale value	Baffle wall	Stainless steel 1.4301 (AISI 304) Fixed by screws inside the case
	Short time :	100% of full scale value	Safety	S1 according EN837-1 Pressure gauge with blow-out device
Accuracy	Class 1 (according EN837-1)			
Protection rating	IP 65 (EN 60529)			
Process Connection	MJX :	Stainless steel 1.4404 (AISI 316L)		
	MMJ :	Monel 400		
Bourdon tube	MJX :	Stainless steel 1.4404 (AISI 316L)		
	MMJ :	Monel 400		
Case	Stainless steel 1.4301 (AISI 304) Option : Stainless steel 1.4404 (AISI 316L)			


### Options

ATEX II2GDc-IM2c	Code 0078
Adjustable micro metric pointer (P ≥ 1.6 bar)	Code 0678
Adjustable friction pointer	Code 0679
Restrictor screw Ø 0.5 (for fittings > 1/4")	Code 0771
Stainless steel 1.4404 (AISI 316L) solid drawn Bourdon tube	Code 0816
Accuracy class	0.5 P > 1 bar Code 0843
	0.6 P > 1 bar Code 0840

### To be ordered separately

Material certificate 3.1 EN10204	Code Q1229
Calibration certificate EN837-1 (5 points raising and 5 points falling)	Code Q1070

## Dimensions - Types of mounting

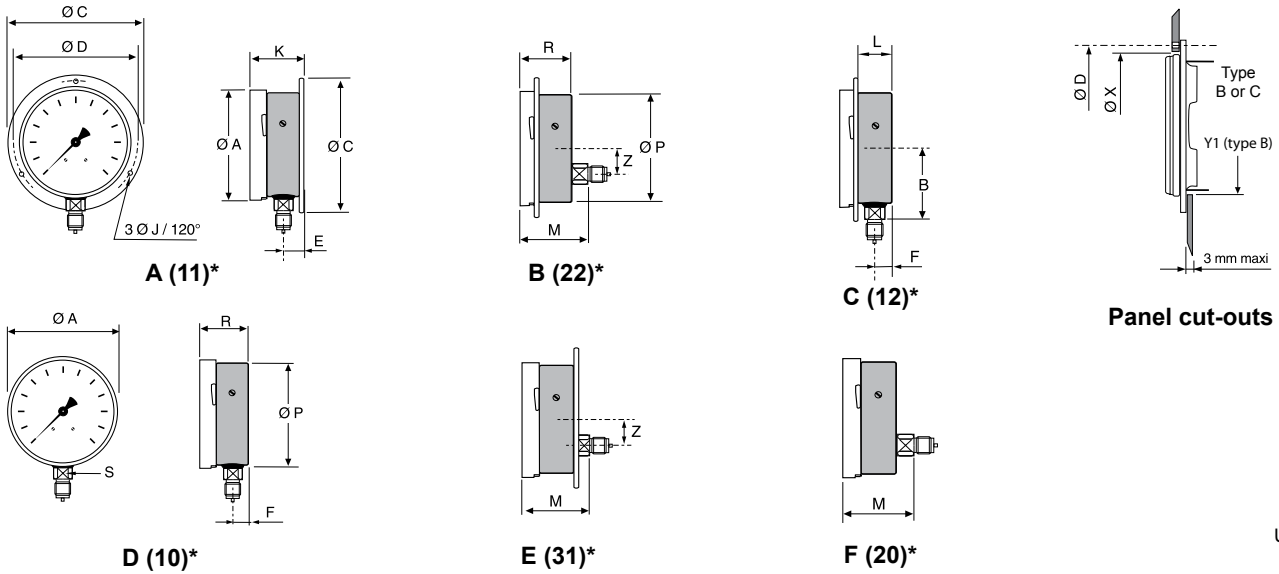

**Weight (kg)**  
Filled : 1.700  
Unfilled : 0.880

\*Type of mounting according to EN837-1 in brackets

mm	A	B	C	D	E	F	J	K	L	M	P	R	S	W	X	Y1	Z
<b>NS 150</b>	150.2	85	180	168	25.5	23.5	5.5	56.5	37.5	68.5	142	54.5	22	152	151	145	31.5

## Pressure ranges

Code	Bar	Code	kPa	Code	kg/cm <sup>2</sup>	Code	psi
B59	-1 ... 0	D59	-100 ... 0	F59	-1 ... 0	H59	-30" Hg ... 0
B72	-1 ... 0.6	D72	-100 ... 60	F72	-1 ... 0.6	H73	-30" Hg ... 15
B74	-1 ... 1.5	D74	-100 ... 150	F74	-1 ... 1.5	H75	-30" Hg ... 30
B76	-1 ... 3	D76	-100 ... 300	F76	-1 ... 3	H2C	-30" Hg ... 60
B77	-1 ... 5	D77	-100 ... 500	F77	-1 ... 5	H78	-30" Hg ... 100
B79	-1 ... 9	D79	-100 ... 900	F79	-1 ... 9	H79	-30" Hg ... 150
B81	-1 ... 15	D81	-100 ... 1 500	F81	-1 ... 15	H81	-30" Hg ... 220
B82	-1 ... 24	D82	-100 ... 2 400	F82	-1 ... 24	H82	-30" Hg ... 300
B12	0 ... 0.6	D12	0 ... 60	F12	0 ... 0.6	H13	0 ... 10
B15	0 ... 1	D15	0 ... 100	F15	0 ... 1	H15	0 ... 15
B16	0 ... 1.6	D16	0 ... 160	F16	0 ... 1.6	H1C	0 ... 20
B18	0 ... 2.5	D18	0 ... 250	F18	0 ... 2.5	H17	0 ... 30
B19	0 ... 4	D19	0 ... 400	F19	0 ... 4	H19	0 ... 60
B20	0 ... 6	D20	0 ... 600	F20	0 ... 6	H21	0 ... 100
B22	0 ... 10	D22	0 ... 1 000	F22	0 ... 10	H22	0 ... 160
B24	0 ... 16	D24	0 ... 1 600	F24	0 ... 16	H23	0 ... 200
B26	0 ... 25	D26	0 ... 2 500	F26	0 ... 25	H25	0 ... 300
B27	0 ... 40	D27	0 ... 4 000	F27	0 ... 40	H26	0 ... 400
B29	0 ... 60	D29	0 ... 6 000	F29	0 ... 60	H27	0 ... 600
B31	0 ... 100	D31	0 ... 10 000	F31	0 ... 100	H30	0 ... 1 000
B33	0 ... 160	D33	0 ... 16 000	F33	0 ... 160	H31	0 ... 1 500
B35	0 ... 250	D35	0 ... 25 000	F35	0 ... 250	H34	0 ... 3 000
B38	0 ... 400	D38	0 ... 40 000	F38	0 ... 400	H38	0 ... 6 000
B39	0 ... 600	D39	0 ... 60 000	F39	0 ... 600	H40	0 ... 10 000
B41	0 ... 1 000	D41	0 ... 100 000	F41	0 ... 1 000	H41	0 ... 15 000
B42	0 ... 1 600	D42	0 ... 160 000	F42	0 ... 1 600	H1D	0 ... 20 000

## Ordering details MJX7 - MMJ7

	7	-		.	xxx	/
<b>Model</b>						
All stainless steel pressure gauge	MJX					
Pressure gauge with monel Bourdon tube <sup>(1)</sup>	MMJ					
<b>Nominal size</b>						
150 mm	7					
<b>Type of mounting</b>						
<b>Stainless steel case and bezel ring 1.4301 (AISI 304)</b>						
Bottom connection, back flange for wall mounting, 3 mounting holes						A
Back connection, front flange, 3 mounting holes						B
Bottom connection, front flange, 3 mounting holes						C
Bottom connection						▶ D
Back connection, back flange for wall mounting, 3 mounting holes						E
Back connection						▶ F
<b>Stainless steel case and bezel ring 1.4404 (AISI 316L)</b>						
Bottom connection, back flange for wall mounting, 3 mounting holes						1
Back connection, front flange, 3 mounting holes						2
Bottom connection, front flange, 3 mounting holes						3
Bottom connection						4
Back connection, back flange for wall mounting, 3 mounting holes						5
Back connection						6
<b>Process connection</b>						
G 1/4						2
G 1/2						▶ 3
1/4 NPT						5
1/2 NPT						▶ 6
<b>Liquid filling</b>						
Dry						▶ 0
BH1: low viscosity glycerin/water 86% (medium : -20 ... +70°C) <sup>(2)</sup>						1
BH2: high viscosity glycerin 99.5% (medium : 0 ... +90°C) <sup>(2)</sup>						2
BH3: silicone oil (medium : -40 ... +100°C) <sup>(2)</sup>						3
BH4: silicone oil (medium : -60 ... +100°C) <sup>(2)</sup>						4
<b>Unit of measurement / Pressure ranges</b> <sup>(3)</sup>						
bar						▶ Bxx
psi						▶ Hxx
kPa						▶ Dxx
kg/cm <sup>2</sup>						Fxx
bar / psi (double scale)						Kxx
psi / bar (double scale)						Sxx
<b>Options to be added behind the / (see example below)</b>						

( ▶ Standard version)

<sup>(1)</sup> Monel version is not available for pressure ranges x41, x42 and H1D

<sup>(2)</sup> Pressure range 0.6 bar: accuracy cl. 2.5 with BH1, BH3 and BH4, not available with BH2

<sup>(3)</sup> Available standard pressures ranges, see tables on page 2. For ranges not listed, please contact Baumer.

## Ordering example with options

	MJX	7	-	B	6	0	.	B22	/	0678	-	0771
All stainless steel pressure gauge	←											
Nominal size 150 mm	←											
Back connection, front flange, 3 mounting holes, case material 1.4301	←											
Process connection 1/2 NPT	←											
No liquid filling	←											
Scale bar : 0 ... 10 bar	←											
Option : Adjustable micro metric pointer (P ≥ 1.6 bar)	←											
Option : Restrictor screw Ø 0.5	←											