



Product highlights

- For non-corrosive gasses and liquids
- Class 2.5 according to EN 837-1
- Wetted parts: Brass
- OEM applications

Technical data

Housing

Nominal size	50 mm
Case material	Black painted, steel
Bezel ring material	Black painted, steel
Window material	Instrument glass
Protection rating (EN 60529)	IP32
Dial	White, aluminium
Pointer	Black, aluminium
Movement material	Brass

Temperature

Media temperature	-20°C ... +60°C
-------------------	-----------------

Wetted parts

Process connection material	Brass
-----------------------------	-------

Wetted parts

Bourdon tube	Copper alloy
--------------	--------------


Performance

Accuracy according to EN 837-1	Class 2.5
Min. measuring range	0 ... 1 bar
Max. measuring range	0 ... 250 bar
Type of pressure	<ul style="list-style-type: none"> ■ Gauge ■ Vacuum
Pressure limitation	<ul style="list-style-type: none"> ■ Steady: 75 % of full scale value ■ Fluctuating: 60 % of full scale value ■ Short time: 100 % of full scale value
Temperature coefficient at +20°C	± 0.4 % FS/10K

Weight

Gauge	103 g
-------	-------

Technical drawings

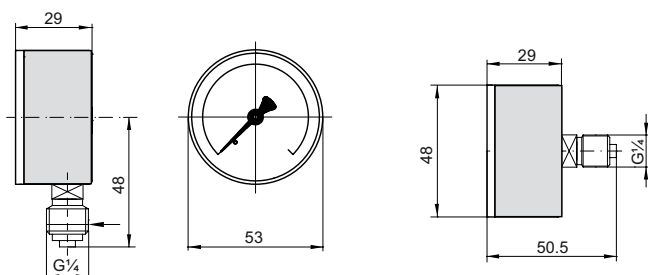

Type D

Type F

Ordering reference

Order key

Product	MAT Utility pressure gauge	MAT	2	-	D	2	0	.	Bxx
Dimension	Nominal size 50 mm								
Case	Bottom connection				D				
	Back connection				F				
Process connection	G 1/4					2			
Damping fluid	Without damping fluid						0		
Measuring range	bar (EN)								Bxx

Pressure ranges

Code	Bar
B59	-1 ... 0
B15	0 ... 1
B16	0 ... 1.6
B18	0 ... 2.5
B19	0 ... 4
B20	0 ... 6
B22	0 ... 10
B24	0 ... 16
B26	0 ... 25
B27	0 ... 40
B29	0 ... 60
B31	0 ... 100
B33	0 ... 160
B35	0 ... 250

Ordering example

Product	MAT Utility pressure gauge	MAT	2	-	D	2	0	.	B22
Dimension	Nominal size 50 mm								
Case	Bottom connection								
Process connection	G 1/4								
Damping fluid	Without damping fluid								
Measuring range	0...10 bar (EN)								