

RDE6

Differential pressure switch, explosion proof for variable static pressure



BOURDON
The Original by Baumer



Main Features

- Excellent repeatability
- Dead band adjustment for regulation
- Fix dead band for control and alarm
- Static pressure max. 20 bar
- No influence of the static pressure on the setpoint
- Explosion proof Hazardous areas 1, 2, 21, 22

Applications

- Power generation safety equipment
- Pressurized chambers control
- Liquid level control


Technical Data

| | | | |
|--------------------|---|-----------------------|---|
| Pressure range | 10 ... 200 mbar to 10 ... 2000 mbar | Electrical connection | Terminal block with metallic cable gland for Ø 7 to 12 mm standard |
| Temperature | Process: -15 ... +150 °C Ambient: -20 ... + 55 °C Storage: -40 ... + 70 °C | Electrical function | See ordering code details on page 5 |
| Repeatability | ± 1% F.S. / constant pressure cycle | Adjustment | 2 external adjustment screws on top of the case for set point and dead band. The adjustment is not influenced by changes of the static pressure. |
| CE conformity | Low Voltage Directive 2014/35/EU ATEX Directive 2014/34/EU | ATEX/IECEX | <u>Certificate</u> LCIE 03 ATEX 6231X (Type RA80) IECEX LCIE 15.0061X <u>Classification</u> CE Ex II 2 G D Ex d IIC T6 or T5 Gb Ex tb IIIC IIC T80 °C or T95 °C Db <u>T° ambient</u> -20 °C to +60 °C (T6 or T80 °C) or -20 °C to +70 °C (T5 or T95 °C) |
| Protection rating | IP 66 (EN 60529) | | |
| Process Connection | Stainless steel 1.4404 (316L) | | |
| Sensing element | <u>Pressure range codes 156 to 163</u> Flanges: Stainless steel 1.4404 (316L) Diaphragm: Viton® | | |
| Scale | Internal. Accuracy on reading ± 5% F.S. | | |
| Housing | Type RA80, explosion proof, flameproof Aluminium epoxy painted. Captive stainless steel screws | | |
| Mounting | 3 back lugs for wall mounting | | |
| Ground connection | Via internal terminal block | | |


Options

| | |
|--|-----------|
| Customer specific set point adjustment | Code SETP |
| Oxygen application | Code 0765 |
| Lead seal of the adjustment screws | Code 8990 |
| Mounting on 2" pipe | Code 0407 |
| Stainless steel tag plate and wire | Code 9941 |

Principle

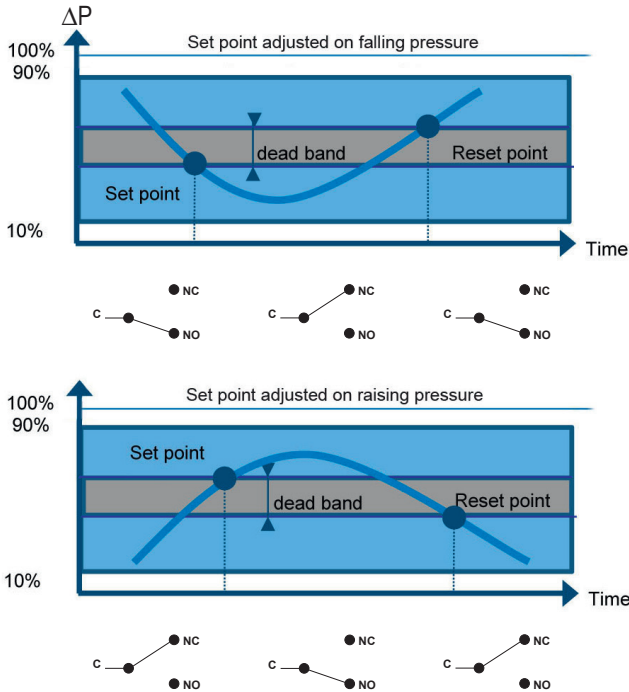

A flexible sensing element actuates a microswitch by means of a piston. The set point is adjusted by means of a compressible spring installed in opposition.

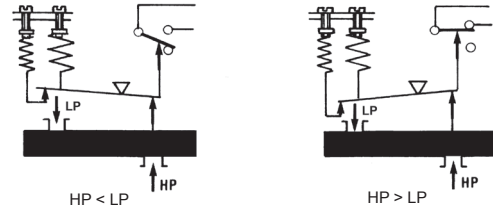

Set point and reset point must be between 10% and 90% of the selected scale.

Standard factory adjustment


Setpoint at 50% of the scale on falling pressure

Customer specific factory adjustment (option SETP)

The following specifications have to be given with the order:

- Setpoint value
- Adjustment on falling or raising pressure.
- Dead band value (as needed) when using an adjustable dead band switch

Electrical connections

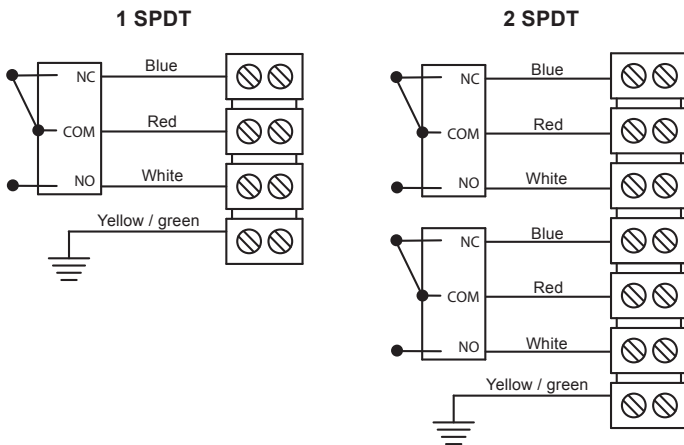

Hazardous areas: 1, 2, 21, 22

| -20 °C ≤ Ta ≤ +70 °C | Dust IP6x | Gases |
|----------------------|------------|-------|
| | T° surface | Class |
| Ta = 60 °C | 80 °C | T6 |
| Ta = 70 °C | 95 °C | T5 |

Important : Maximum power dissipated inside enclosure does not exceed 5 W

All necessary measures must be taken by the user, to avoid the calorific transfer from the fluid to the apparatus head increasing the head's temperature to such that it reaches the self-ignition temperature of the gas in which it is used.

Micro switches characteristics

| Switch code | A (B) | M (K) | C (W) | E (F) | D (V) |
|---|---------------|--------------|-----------------|-----------------|--------------------------|
| Type | Standard | Gold contact | Hermetic | Ultra sensitive | Ultra sensitive Hermetic |
| 6 Vdc | 0.4... 10 A | 10... 50 mA | 5 mA ... 4 A | 0.4... 1 A | 0.4... 4 A |
| 12 Vdc | 0.4... 10 A | 10... 50 mA | 5 mA ... 4 A | 0.4... 1 A | 0.4... 4 A |
| 24 Vdc | 0.4... 6 A | 10... 50 mA | 5 mA ... 4 A | 0.4... 1 A | 0.4... 4 A |
| 30 Vdc | 0.4... 6 A | 10... 50 mA | 5 mA ... 3 A | 0.4... 1 A | 0.4... 2 A |
| 48 Vdc | 0.4... 6 A | 10... 50 mA | 5 mA ... 3 A | N/A | N/A |
| 110 Vdc | 0.1... 0.5 A | 10... 50 mA | 5 mA ... 1 A | N/A | N/A |
| 220 Vdc | 0.1... 0.25 A | 10... 50 mA | 5 mA ... 0.5 A | N/A | N/A |
| 115 Vac | 0.4... 10 A | 10... 50 mA | 50 mA ... 3 A | 0.4... 10 A | N/A |
| 250 Vac | 0.2... 10 A | N/A | 50 mA ... 2.5 A | 0.2 ... 10 A | N/A |
| Dielectric rigidity between contacts and ground | 2000 V | 2000 V | 1500 V | 2000 V | 1000 V |

Adjustable ranges

| Scale | Max ΔP | Max P Static | Code | Micro-switch dead band ⁽¹⁾ | | | | | | | | | |
|-------------|--------|--------------|--------------|---------------------------------------|------------|-----------|-----------|-----------------|------|-------|------|--------|--|
| | | | | Adjustable dead band | | | | Fixed dead band | | | | | |
| | | | | A (B*) | | M (K*) | | C(W*) | | E(F*) | | D (V*) | |
| | | | | 10% | 90% | 10% | 90% | 10% | 90% | 10% | 90% | | |
| mbar | mbar | bar | | mbar | | | | | | | | | |
| 10 ... 200 | 200 | 20 | 156 | 12 - 120 | 15.5 - 120 | 52 - 120 | 67 - 120 | 3.75 | 5.1 | 15 | 19.5 | | |
| 10 ... 400 | 400 | 20 | 157 | 22 - 225 | 30 - 225 | 60 - 225 | 75 - 225 | 6.75 | 9 | 27 | 36 | | |
| 10 ... 1000 | 1000 | 20 | 158 | 27 - 225 | 33 - 225 | 67 - 225 | 90 - 225 | 7.5 | 10.5 | 33 | 40 | | |
| 10 ... 700 | 700 | 20 | 161** | 45 - 375 | 67 - 375 | 195 - 675 | 225 - 675 | 19.5 | 22.5 | 54 | 81 | | |
| 10 ... 1500 | 1500 | 20 | 162** | 45 - 450 | 67 - 450 | 195 - 675 | 225 - 675 | 19.5 | 22.5 | 54 | 81 | | |
| 10 ... 2000 | 2000 | 20 | 163** | 67 - 450 | 135 - 450 | 270 - 675 | 450 - 675 | 27 | 37.5 | 81 | 162 | | |




(*) For version with 2 microswitches lower values of the dead band must be multiplied x 1.5

(**) G 1/4 female only

⁽¹⁾ The value of the dead band is depending on the value of the set point.



This table contains the dead band values for set point adjustment at 10% and 90% of the selected scale. For adjustable dead band the lower value corresponds to the dead band spring totally released and the higher corresponds to the dead band spring fully tensed. For other set points the dead band value can be calculated by linear interpolation between the values at 10% and 90%.

Dimensions (mm)

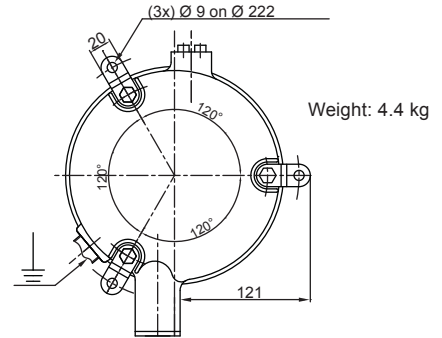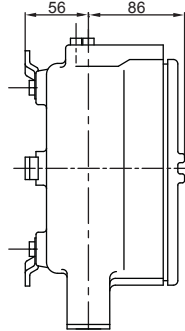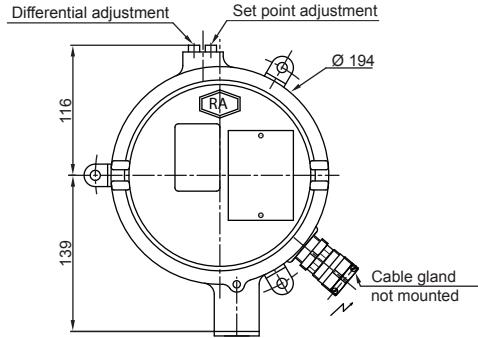

Pressure range codes: 156 - 157 - 158
Weight: 4.4 kg

Pressure range codes: 161 - 162 - 163
Weight: 3.3 kg

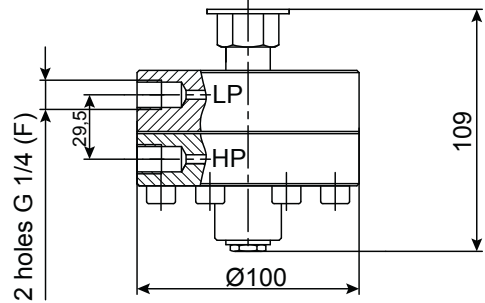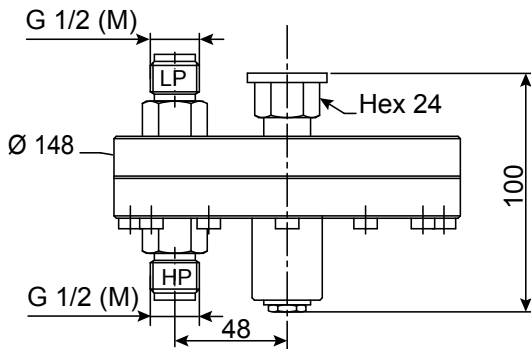

Ordering details RDE6

| | RD | E | - | 6 | | . | xxx | / |
|---|----|---|---|-----|-----|---|-----|--------------------------------|
| Model | | | | | | | | |
| Differential pressure switch for variable static pressure | RD | | | | | | | |
| Approvals | | | | | | | | |
| Explosion proof | | E | | | | | | |
| Sensing element | | | | | | | | |
| Diaphragm (Viton®) | | | | 6 | | | | |
| Type of micro switches | | | | | | | | |
| | | | | | | | | |
| Deadband | | | | | | | | |
| 1 SPDT standard changeover switch | | | | | | | A | |
| 2 SPDT standard changeover switch | | | | | | | B | |
| 1 SPDT hermetically changeover switch | | | | | | | C | |
| 2 SPDT hermetically changeover switch | | | | | | | W | |
| 1 SPDT ultra sensitive changeover switch | | | | | | | E | |
| 2 SPDT ultra sensitive changeover switch | | | | | | | F | |
| 1 SPDT hermetically, ultra sensitive changeover switch | | | | | | | D | |
| 2 SPDT hermetically, ultra sensitive changeover switch | | | | | | | V | |
| 1 SPDT gold contact changeover switch | | | | | | | M | |
| 2 SPDT gold contact changeover switch | | | | | | | K | |
| Process connection | | | | | | | | |
| G 1/4 female (only pressure ranges 161, 162, 163) | | | | | | | H | |
| G 1/2 male (standard) | | | | | | | 3 | |
| 1/2 NPT male | | | | | | | 6 | |
| 1/4 NPT female | | | | | | | 8 | |
| Pressure range (mbar) | | | | | | | | |
| | | | | | | | | |
| 10 ... 200 | | | 1 | ... | 20 | | | 156 |
| 10 ... 400 | | | 1 | ... | 40 | | | 157 |
| 10 ... 1000 | | | 1 | ... | 100 | | | 158 |
| 10 ... 700 | | | 1 | ... | 70 | | | 161 |
| 10 ... 1500 | | | 1 | ... | 150 | | | 162 |
| 10 ... 2000 | | | 1 | ... | 200 | | | 163 |
| | | | | | | | | Process connection G1/4 female |
| | | | | | | | | Process connection G1/4 female |
| | | | | | | | | Process connection G1/4 female |
| Options to be added behind the / (see example below) | | | | | | | | |

Ordering example with options

| | RD | E | - | 6 | C | 3 | . | 111 | / | 0407 | _ | 9941 |
|---|----|---|---|---|---|---|---|-----|---|------|---|------|
| Differential pressure switch for variable static pressure | RD | | | | | | | | | | | |
| With ATEX/IECEx approval explosion proof | | E | | | | | | | | | | |
| Sensing element diaphragm | | | | 6 | | | | | | | | |
| 1 SPDT hermetically changeover switch | | | | | C | | | | | | | |
| Process connection G 1/2 male | | | | | | 3 | | | | | | |
| Pressure range 2 ... 10 mbar | | | | | | | . | | | | | |
| Option: Mounting on 2" pipe | | | | | | | | 111 | | | | |
| Option: Stainless steel tag plate and wire | | | | | | | | | | 0407 | | |
| | | | | | | | | | | | _ | 9941 |