


USDR-M | metric thread

Connectors

Metal connector, safety-type, straight, turnable metric outer thread, incl. ferrule [brass], brass thrust collar [MSD] and O-ring [NBR]

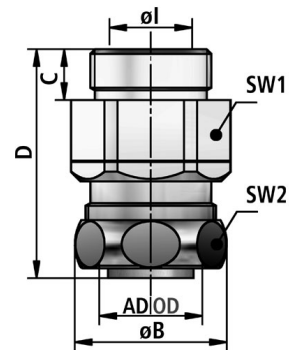

Temperature: -40°C ... +250°C

Material: nickel-plated brass

Protection class [acc. to EN 60529]: IP00



FLEXA No.	OD [mm]	Thread type	Conduit DI	Conduit OD	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	Weight [kg/100]	PU [pcs.]
15014328012	10,0	M12 x 1,5	7,0	10,0	6,0	19,0	10,0	28,0	15	17	2,400	10
15014327016	14,0	M16 x 1,5	11,0	14,0	9,0	23,0	10,0	30,0	21	21	5,000	10
15014328020	17,0	M20 x 1,5	13,0	17,0	11,5	27,0	10,0	30,0	24	25	6,400	10
15014328025	21,0	M25 x 1,5	17,0	21,0	15,5	31,0	11,0	31,0	30	29	9,500	10
15014340032	27,0	M32 x 1,5	23,0	27,0	20,5	39,0	13,0	38,0	36	36	14,900	10
15014328040	36,0	M40 x 1,5	29,0	36,0	27,5	48,0	13,0	42,0	46	45	23,900	2
15014328050	45,0	M50 x 1,5	38,0	45,0	35,0	57,0	14,0	50,0	55	54	36,200	2
15014328063	56,0	M63 x 1,5	51,0	56,0	45,0	70,0	14,0	54,0	70	66	61,000	2

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.