


LIF-M | metric thread

Connectors

Metal connector, straight, fixed metric outer thread

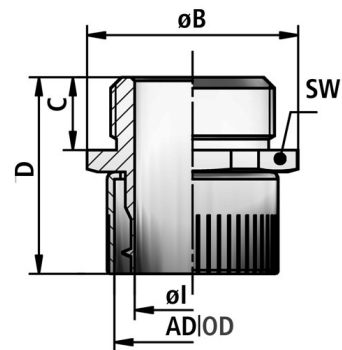

Temperature: -40°C ... +250°C

Material: nickel-plated brass

Protection class [acc. to EN 60529] IP0



FLEXA No.	OD [mm]	Thread type	Conduit DI	Conduit OD	ø I [mm]	ø B [mm]	C [mm]	D [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
15801310012	10,0	M12 x 1,5	7,0	10,0	5,9	16,0	10,0	26,0	15	1,550	50
15801314016	14,0	M16 x 1,5	10,0	14,0	8,9	21,0	10,0	27,0	19	2,400	50
15801317016	17,0	M16 x 1,5	13,0	17,0	11,0	25,0	10,0	27,0	23	3,000	50
15801317020	17,0	M20 x 1,5	13,0	17,0	12,0	25,0	10,0	27,0	23	2,900	50
15801321020	21,0	M20 x 1,5	17,0	21,0	15,0	29,0	10,0	27,0	27	3,800	50
15801327025	27,0	M25 x 1,5	22,0	27,0	20,0	37,0	11,0	30,5	34	6,300	25
15801336032	36,0	M32 x 1,5	29,0	36,0	27,5	45,6	13,0	33,0	43	8,100	25
15801345040	45,0	M40 x 1,5	38,0	45,0	35,0	59,0	13,0	33,0	54	13,300	25
15801356050	56,0	M50 x 1,5	49,0	56,0	45,0	69,0	14,0	34,0	66	18,500	10
15801810012	10,0	M12 x 1,5	7,0	10,0	5,9	16,0	10,0	26,0	15	1,550	10
15801814016	14,0	M16 x 1,5	10,0	14,0	8,9	21,0	10,0	27,0	19	2,400	10
15801817016	17,0	M16 x 1,5	13,0	17,0	11,0	25,0	10,0	27,0	23	3,000	10
15801817020	17,0	M20 x 1,5	13,0	17,0	12,0	25,0	10,0	27,0	23	2,900	10
15801821020	21,0	M20 x 1,5	17,0	21,0	15,0	29,0	10,0	27,0	27	3,800	10
15801827025	27,0	M25 x 1,5	22,0	27,0	20,0	37,0	11,0	30,5	34	6,300	10
15801836032	36,0	M32 x 1,5	29,0	36,0	27,5	45,6	13,0	33,0	43	8,100	2
15801845040	45,0	M40 x 1,5	38,0	45,0	35,0	39,0	13,0	33,0	54	13,300	2
15801856050	56,0	M50 x 1,5	49,0	56,0	45,0	69,0	14,0	34,0	66	18,500	2

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.