


EW 90-M | metric thread**Connectors**

Metal connector, elbow 90°, metric outer thread, incl. ferule and sealing

Temperature: -45°C ... +105°C

Material: nickel-plated brass

Protection class [acc. to EN 60529]: IP67

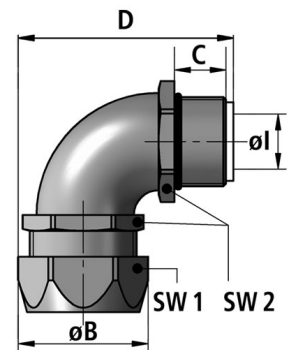

FLEXA No.	OD [mm]	Thread type	Conduit DI	Conduit OD	ø I [mm]	ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	Weight [kg/100]	PU [pcs.]
10607000116	5/16 inch	M16 x 1,5	10,0	14,5	8,3	29,0	12,0	57,0	26	22	8,200	10
10607000016	3/8 inch	M16 x 1,5	12,5	18,0	10,2	29,0	12,0	49,0	26	22	8,200	10
10607000120	5/16 inch	M20 x 1,5	10,0	14,5	8,3	29,0	13,0	57,0	26	22	8,400	10
10607000020	3/8 inch	M20 x 1,5	12,5	18,0	10,2	29,0	13,0	49,0	26	22	8,400	10
10607000021	1/2 inch	M20 x 1,5	16,0	21,0	13,9	32,7	13,0	54,0	29	27	12,600	10
10607000025	3/4 inch	M25 x 1,5	21,0	26,5	18,5	38,7	15,0	65,0	35	33	19,200	5
10607000032	1 inch	M32 x 1,5	26,5	33,0	24,3	50,0	15,0	75,0	45	42	31,600	5
10607000040	1 1/4 inch	M40 x 1,5	35,5	42,0	31,8	60,0	16,0	90,0	54	51	56,100	2
10607000063	2 inch	M63 x 1,5	51,5	60,0	47,8	85,0	20,0	120,00	77	74	139,800	2

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.