



SPK-RS485

PRODUCT SPECIFICATION

SPK-RS485

Materials ABS

Ambient operating temperature -25°C to +50°C

Volume Max 85dB at 1m

Protection rating IP23

Compliant with RoHS directive

- Panel type signal phone that outputs clear and cheerful 8-48Khz MP3 Audio harmony by applying industrial RS485 communication
- Up to 255ea of frame IDs can be set by software manager
- Can select and play 255 songs using RS485 communication
- Save MP3 sound source using USB2.0 Micro Type B cable
- Supports 128Mbyte storage capacity (File format: FAT)
- Supports 4 communication speeds: 9600bps, 19200bps, 38400bps, 115200bps

SPK-RS485 Signal phone for RS485 communication panel

Model number	Sound type	Volume	Voltage	Current	Certificates	Weight
SPK-RS485	MP3 File(255 Sounds) RS485 protocol	Max 85dB (Based on 1KHz)	DC12V~24V	Max. 0.600A	CE	0.19kg

※ DC type model has a free-voltage range of 10V-36V




Terminal box for Signal phone for RS485 communication panel(back side)

Technical Diagram


·SPK-RS485

Units: mm

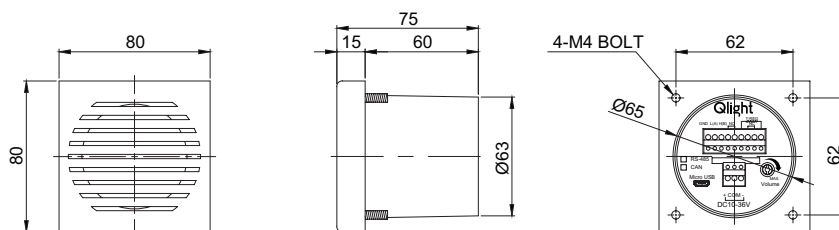

Wiring Instructions

·SPK-RS485

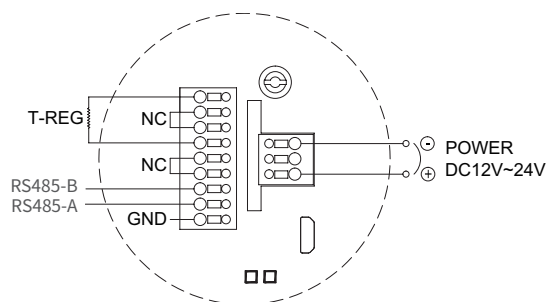

Ordering Specification

SPK-RS485

[Model number]

SPK-RS485

12/24

[Voltage]

12/24-DC12V~24V