

SMCL80-BZ-2-24-RG-TR

Multiple Color LED Steady/ Flashing
Signal Light



Common Specifications

- Injection machine specialized multiple color LED steady/flashing signal lights
- Injection machine specialized multi-colored LED signal lights that can choose various audible & visual signals
- This budget model uses a multiple color LED light source to provide signals in two colors.
- The subdued light provides a comfortable and stable viewing condition for operation in close proximity
- Materials : Lens-AS, Body-ABS, Reflector-Heat resistant ABS
- Volume : Max 90dB at 1m
- Flashing rate : 60-80 flashes/min
- Ambient operating temperature : -30°C to +50°C
- Protection rating : IP44
- RoHS Compliant




SMCL80-BZ-2-24-RG-TR Multiple Color LED Steady/ Flashing LED Signal Lights

Model number	Layers	Voltage	Current	Certificates	Weight	Color
SMCL125	2	DC24V	0.063A	-	0.22kg	<div> <div></div> R-Red <div></div> G-Green </div>



Technical Diagram

(Units : mm)

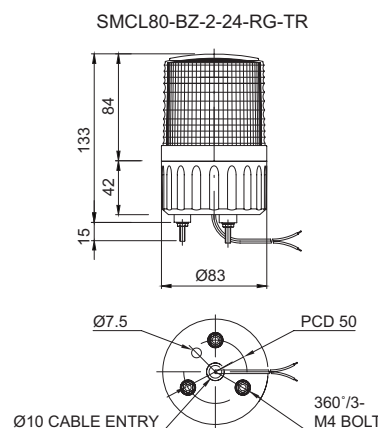


Wiring Instructions

- SMCL type can be wired with external contacts and transistor
- Wiring to transistor, use the NPN transistor. Please wire properly based on wiring instructions
- External power line standard : UL1015 AWG18(0.75sq)×3C 500mm



Wiring Instructions

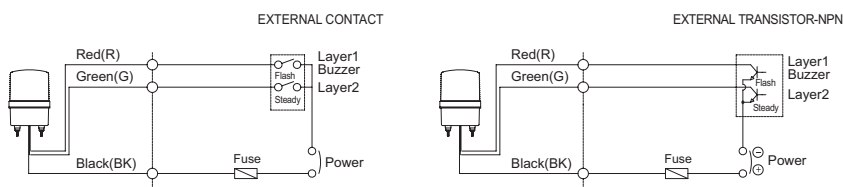

Customization

- Wall mounting bracket options : Bracket structure allows for threading through the bracket hole or into the wall mount



Wall Mount Bracket
TWS80



Wall Mount Bracket
TWA80



Ordering Specification

SMCL80	-	BZ	-	2	-	24	-	RG
[Model number]		[Buzzer option]		[Color]		[Voltage]		[Color]
• SMCL80		• BZ - Built-in buzzer		2-2colors		• 24-DC24V		<div> <div></div> R-Red <div></div> G-Green </div>