

SPK-IO

Signal phone for multi-channel panel



SPK-IO

SPK-IO Signal phone for multi-channel panel Max.85dB

- Panel type signal phone that outputs clear and cheerful 8-48Khz MP3 Audio chords using IO input
- Compatible with NPN and PNP depending on the connection method by using the terminal block for connection on the back of the product
- Plays 255ea of MP3 files with binary input method
- Save sound source using USB2.0 Micro Type B cable
- Material: ABS
- Volume: Max. 85dB at 1m
- Ambient temperature: -25°C~+50°C
- Protection class: IP23
- Compliant with RoHS directive

Model number	Sound Type	dB	Voltage/Current	Certificate	Weight
SPK-CAN	MP3 File (255 Sounds) IO protocol	Max 85dB (Based on 1KHz)	DC12-24V/0.500A	CE	0.19kg




Technical Diagram

(Units : mm)



Terminal box for Signal phone panel(back side)

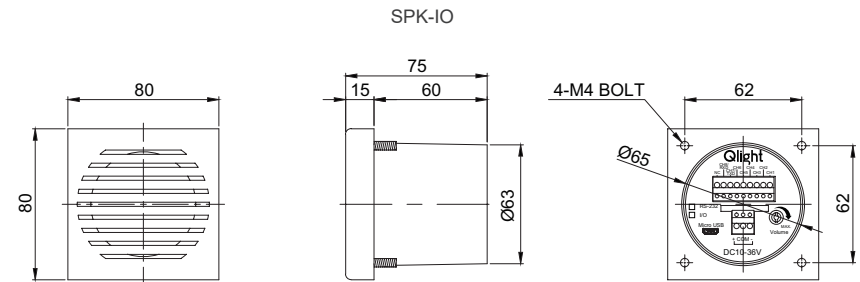

Ordering Specification

SPK-IO	-	12/24
[Model number]		[Voltage]
• SPK-IO		• 12/24-DC12V-24V

SPK-IO


Signal phone for multi-channel panel




Wiring Instructions

EXTERNAL CONTACT

SPK-IO " - "

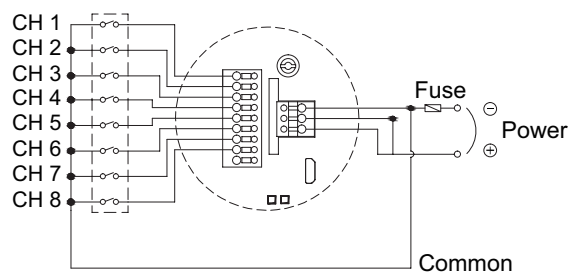


SPK-IO " + "

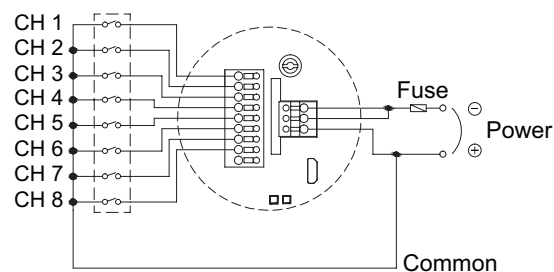

EXTERNAL TRANSISTOR

TRANSISTOR-NPN

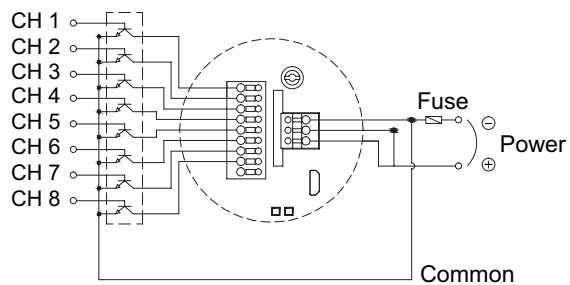

TRANSISTOR-PNP

