


USZ-EX-M | metric thread

Connectors

Metal connector, safety-type, straight, metric outer thread, strain relief, incl. ferrule [brass], sealing [TPE] and O-ring [NBR], for application in EX-Area

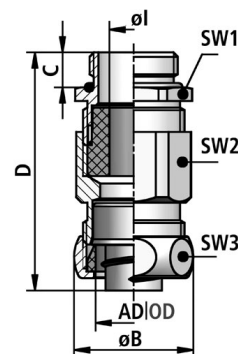

Temperature: -40°C ... +100°C

Material: nickel-plated brass

Protection class [acc. to EN 60529]: IP00



FLEXA No.	OD [mm]	Thread type	Clamp.range [mm]	Conduit DI	Conduit OD	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	WS1 [mm]	WS2 [mm]	WS3 [mm]	Weight [kg/100]	PU [pcs.]
5023.327.120	17,0	M20 x 1,5	9,5-11,0	14,0	17,0	12,5	27,0	10,0	48,0	24	24	25	6,600	10
5023.327.020	21,0	M20 x 1,5	12,0-15,0	18,0	21,0	16,0	31,0	10,0	49,0	24	29	29	9,700	10
5023.327.125	21,0	M25 x 1,5	13,0-16,0	18,0	21,0	16,0	31,0	11,0	54,0	30	30	29	9,900	10
5023.339.132	27,0	M32 x 1,5	19,0-21,0	24,0	27,0	21,0	39,0	13,0	65,0	36	36	36	16,600	10

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.